

CAPELLA LED BOX VD 2500LM 840 IP54 CORRIDOR BIAŁY (24W) 320MM

DETAILED CARD



TECHNICAL PARAMETERS

Index:	660146
Ingress protection:	IP54
Impact resistance:	IK06
Nominal power [W]:	24
Luminous flux [lm]*:	2500
Colour temperature [K]:	4000
SDCM:	≤ 6
Energy efficiency class:	F
Material of the body:	ABS

CHARACTERISTICS

CAPELLA LED is a wide line of luminaires combining high aesthetic values and lighting parameters. The body has been made from ABS and the frosted diffuser from impact-resistant polycarbonate (PC). A multitude of versions makes it possible to adapt the luminaire to many non-standard applications.

APPLICATION

Surface-mounted wall or ceiling luminaire intended for indoor use (utility rooms, staircases, circulation routes). It is also available in a version with an RF motion detector which is especially recommended for use in spaces open to the public.


CAPELLA LED BOX VD 2500LM 840 IP54 CORRIDOR BIAŁY (24W) 320MM

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Nominal power [W]:	24	Working temperature [°C]:	from -20 to +35
Rated power of the luminaire [W]:	28	Motion sensor:	yes
Supply voltage [V]:	220 - 240	Dimensions of single box [mm]:	342/342/122
Luminous flux [lm]:	2500	Net weight [kg]:	0.725
Luminous efficacy [lm/W]:	85	Warranty [years]:	5
Energy efficiency class:	F	Flicker procent:	100
Electrical protection class:	II	Index:	660146
Colour temperature [K]:	4000	Category type:	bulkheads
Colour rendering index:	>80	Category of application:	educational institutions
SDCM:	≤ 6	Rated power rating 30min [W]:	28
Power factor:	0.84	Luminous flux of the luminaire 0 min [lm]*:	2500
Beam angle [°]:	120	AC voltage range [V]:	220 - 240
Surge protection [kV]:	2	ITHD [%]:	74
Diffuser material:	PC	Corridor function:	yes
Diffuser type:	OPAL	EDGE/BOX Colour:	white
Material of the body:	ABS	Frequency [Hz]:	50 - 60
Colour of the body:	white	Dusk sensor:	yes
Dimensions (H/W/T/S) [mm]:	320/105	LED lifespan L70B50 [h]:	125000
Mounting dimensions [mm]:	160	LED lifespan L80B20 [h]:	80000
Impact resistance:	IK06	LED lifespan L90B10 [h]:	40000
Ingress protection:	IP54	Max load (RCR) [W]:	400
Mounting version:	surface	Manual:	Download PDF

LIGHT CURVES

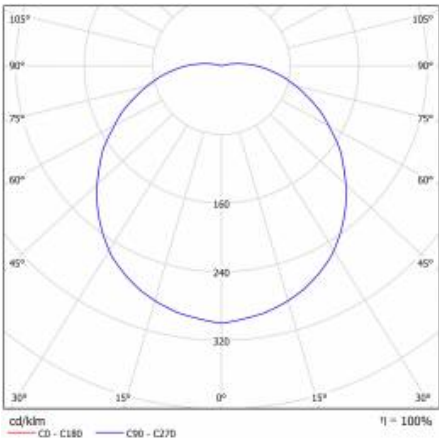

Card creation date: 17 September 2020

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 156/2020



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl