

# RQ 160 LED N 2100LM PRM 830 (17W)

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	570537
<b>Ingress protection:</b>	IP33
<b>Nominal power [W]:</b>	17
<b>Luminous flux [lm]*:</b>	2100
<b>Colour temperature [K]:</b>	3000
<b>Colour rendering index:</b>	>80
<b>Energy efficiency class:</b>	D
<b>Material of the body:</b>	ABS
<b>Colour of the body:</b>	white
<b>Diffuser material:</b>	PC

## CHARACTERISTICS

RQ 160 LED N is a new line of round luminaires. The construction, designed from scratch, introduces new solutions ensuring excellent lighting parameters. The body is made of plastic, therefore it is characterized by low weight. The diffuser provides excellent light transmission. The integrated LED module guarantees low power consumption and all the advantages of modern LED light sources.

## APPLICATION

Surface-mounted luminaire is especially recommended for offices, spacious corridors and public spaces.


# RQ 160 LED N 2100LM PRM 830 (17W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	570537	Dimensions (H/W/T/S) [mm]:	166/86
Light source:	LED module	Mounting dimensions [mm]:	117
Nominal power [W]:	17	Impact resistance:	IK08
Rated power of the luminaire [W]:	18	Ingress protection:	IP33
Supply voltage [V]:	220 - 240	Glow wire test [°C]:	650
Frequency [Hz]:	50 - 60	Mounting version:	surface
Luminous flux [lm]:	2100	Working temperature [°C]:	from -20 to +35
Luminous efficacy [lm/W]:	111	Net weight [kg]:	0.400
Energy efficiency class:	D	Category type:	downlights
Electrical protection class:	I	LED lifespan L70B50 [h]:	132000
Colour temperature [K]:	3000	LED lifespan L80B20 [h]:	84000
Colour rendering index:	>80	LED lifespan L90B10 [h]:	42000
SDCM:	≤ 3	Photobiological safety:	RG0 - exempt (no photobiological hazard)
Power factor:	0.99	Warranty [years]:	5
Beam angle [°]:	115	Category of application:	HoReCa, commercial facilities, educational institutions, art and culture
Diffuser material:	PC	Warranty [years]:	5
Diffuser type:	PRM	CE certificate:	<a href="#">317/2023</a>
Material of the body:	ABS	Manual:	<a href="#">Download PDF</a>
Colour of the body:	white		

## LIGHT CURVES

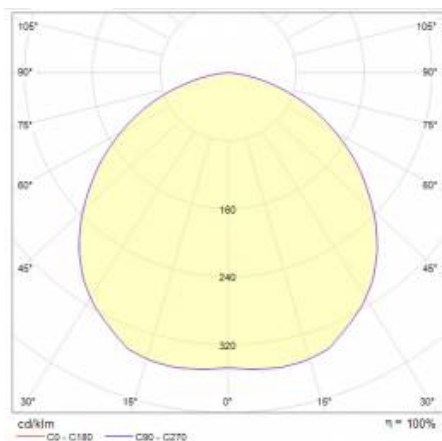

# RQ 160 LED N 2100LM PRM 830 (17W)

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
573637	Suspension RQ160 fi100 white ON/OFF. DALI

Card creation date: 19 August 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 317/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl