

# SQ 160 LED P 2050LM 75DEG 840 (17W)

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	570735
<b>Ingress protection:</b>	IP44/20
<b>Nominal power [W]:</b>	17
<b>Luminous flux [lm]*:</b>	2050
<b>Colour temperature [K]:</b>	4000
<b>Color rendering index (Ra) &gt;:</b>	80
<b>Energy efficiency class:</b>	E
<b>Material of the body:</b>	ABS
<b>Colour of the body:</b>	white
<b>Diffuser material:</b>	PS

## CHARACTERISTICS

SQ 160 LED P is a new line of square luminaires. The construction, designed from scratch, introduces new solutions ensuring excellent lighting parameters. The body is made of plastic, therefore it is characterized by low weight. The diffuser provides excellent light transmission. The integrated LED module guarantees low power consumption and all the advantages of modern LED light sources.

## APPLICATION

Recessed-mounted luminaire with the possibility of flush mounting in modular ceilings and in plasterboard ceilings (using plasterboard recessing kit) is especially recommended for offices, spacious corridors and public spaces.


# SQ 160 LED P 2050LM 75DEG 840 (17W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	570735	Dimensions (H/W/T/S) [mm]:	158/158/70
Light source:	LED module	Mounting dimensions [mm]:	145x145
Nominal power [W]:	17	Impact resistance:	IK08
Rated power of the luminaire [W]:	18	Ingress protection:	IP44/20
Supply voltage [V]:	220 - 240	Glow wire test [°C]:	650
Frequency [Hz]:	50 - 60	Mounting version:	recessed
Luminous flux [lm]:	2050	Working temperature [°C]:	from -20 to +35
Luminous efficacy [lm/W]:	109	Net weight [kg]:	0.270
Energy efficiency class:	E	Category type:	downlights
Electrical protection class:	I	LED lifespan L70B50 [h]:	150000
Colour temperature [K]:	4000	LED lifespan L80B10 [h]:	100000
Color rendering index (Ra) >:	80	LED lifespan L90B10 [h]:	50000
SDCM:	3	Category of application:	educational institutions, HoReCa, commercial facilities
Power factor:	0.99	Photobiological safety:	RG0 - exempt (no photobiological hazard)
Beam angle [°]:	75	Warranty [years]:	5
Diffuser material:	PS	CE certificate:	<a href="#">315/2023</a>
Diffuser type:	OPAL	Manual:	<a href="#">Download PDF</a>
Optics:	lens	ISO Certificates:	9001:2015. 14001:2015. 45001:2018. 50001:2018
Material of the body:	ABS	Pliik LDT:	<a href="#">Download</a>
Colour of the body:	white		

## LIGHT CURVES

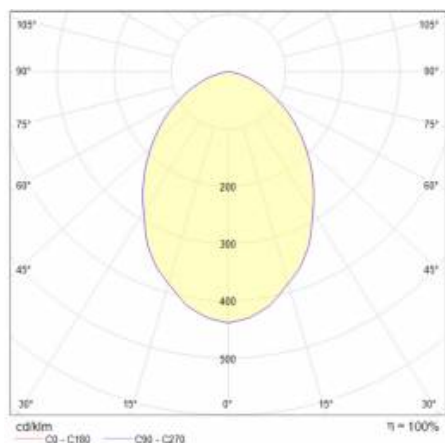

# SQ 160 LED P 2050LM 75DEG 840 (17W)

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
998942	Frame square 220 for SQ160 white RAL9016 structure



Frame square 220 for SQ160 white  
RAL9016 structure (998942)

Card creation date: 30 April 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 315/2023