
BARIS 40 LED Z 2600LM PLX I KL. IP20 1140 MM 830 ANODE CO 33W

DETAILED CARD

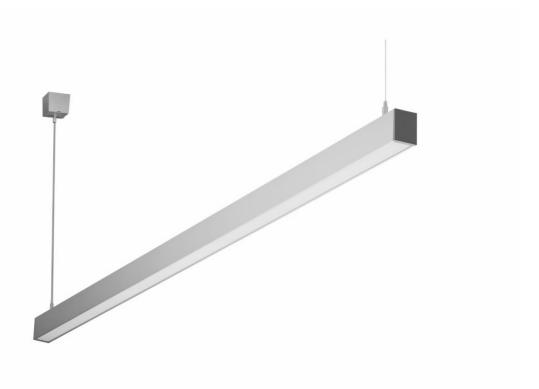

-0

TECHNICAL PARAMETERS

Index: 319594

Rated power of the luminaire [W]*: 33

Luminous flux [lm]*: 2600

Colour temperature [K]: 3000

Ingress protection: IP20

Energy efficiency class:

Material of the body: aluminium

Colour of the body: grey

Diffuser material: PC

Diffuser type: OPAL

CHARACTERISTICS

Suspended or surface-mounted luminaire with a very narrow cross-section. The bodies are available as an anodised aluminium profile in grey or as an aluminium profile painted in white or black (other colours available on request). The optical system in the form of an opal cover. The optical system in the form of a prismatic diaphragm reduces glare and is characterized by a greater light transmittance than the opal diffuser, which has a direct impact on a higher value of luminous efficacy. The luminaire is equipped with a unique suspension system that facilitates mounting and adjustment of the suspension length. All BARIS 40 LED suspended luminaires to have 1.2m long slings in a set with a box.

APPLICATION

The luminaire is intended for indoor use. Especially recommended as a source of main lighting conducive to office work. Unique design, energy-saving LED modules and possible integration with external lighting control systems in the DALI standard make this luminaire suitable for use in modern A+ class office buildings, with particular emphasis on representative rooms. Wall lamps are intended, among others for use in corridors, passageways as well as sanitary rooms and bathrooms, where IP44 class is required



BARIS 40 LED Z 2600LM PLX I KL. IP20 1140 MM 830 ANODE CO 33W


DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index: 319594		
Light source: Rated power of the luminaire [W]: Nominal power [W]: Frequency [Hz]: Luminous flux [Im]: Luminous efficacy [Im/W]: Energy efficiency class: Electrical protection class: Colour temperature [K]: Color rendering index (Ra) >: SDCM: Diffuser material: PC OPAL	Index:	319594
Rated power of the luminaire [W]: 33 Nominal power [W]: 28 Frequency [Hz]: 50 - 60 Luminous flux [Im]: 2600 Luminous efficacy [Im/W]: 79 Energy efficiency class: Colour temperature [K]: 3000 Color rendering index (Ra) >: 80 SDCM: 3 Diffuser material: PC Diffuser type: OPAL	EAN:	5905963319594
Nominal power [W]: 28 Frequency [Hz]: 50 - 60 Luminous flux [Im]: 2600 Luminous efficacy [Im/W]: 79 Energy efficiency class: F Electrical protection class: I Colour temperature [K]: 3000 Color rendering index (Ra) >: 80 SDCM: 3 Diffuser material: PC Diffuser type: OPAL	Light source:	LED
Frequency [Hz]: 50 - 60 Luminous flux [Im]: 2600 Luminous efficacy [Im/W]: 79 Energy efficiency class: F Electrical protection class: I Colour temperature [K]: 3000 Color rendering index (Ra) >: 80 SDCM: 3 Diffuser material: PC Diffuser type: OPAL	Rated power of the luminaire [W]:	33
Luminous flux [Im]: 2600 Luminous efficacy [Im/W]: 79 Energy efficiency class: F Electrical protection class: I Colour temperature [K]: 3000 Color rendering index (Ra) >: 80 SDCM: 3 Diffuser material: PC Diffuser type: OPAL	Nominal power [W]:	28
Luminous efficacy [Im/W]: 79 Energy efficiency class: F Electrical protection class: I Colour temperature [K]: 3000 Color rendering index (Ra) >: 80 SDCM: 3 Diffuser material: PC Diffuser type: OPAL	Frequency [Hz]:	50 - 60
Energy efficiency class: Electrical protection class: Colour temperature [K]: Color rendering index (Ra) >: SDCM: Diffuser material: PC OPAL	Luminous flux [lm]:	2600
Electrical protection class: Colour temperature [K]: 3000 Color rendering index (Ra) >: 80 SDCM: 3 Diffuser material: PC Diffuser type: OPAL	Luminous efficacy [lm/W]:	79
Colour temperature [K]: 3000 Color rendering index (Ra) >: 80 SDCM: 3 Diffuser material: PC Diffuser type: OPAL	Energy efficiency class:	F
Color rendering index (Ra) >: 80 SDCM: 3 Diffuser material: PC Diffuser type: OPAL	Electrical protection class:	1
SDCM: 3 Diffuser material: PC Diffuser type: OPAL	Colour temperature [K]:	3000
Diffuser material: Diffuser type: OPAL	Color rendering index (Ra) >:	80
Diffuser type: OPAL	SDCM:	3
2 mass types	Diffuser material:	PC
Diffuser colour: white	Diffuser type:	OPAL
	Diffuser colour:	white
Material of the body: aluminium	Material of the body:	aluminium
Colour of the body: grey	Colour of the body:	grey
Dimensions (H/W/T/S) [mm]: 53/40/1140	Dimensions (H/W/T/S) [mm]:	53/40/1140

Mounting dimensions [mm]:	1029
Ingress protection:	IP20
Mounting version:	suspended
Net weight [kg]:	1.360
Category type:	luminaires and linear systems
AC voltage range [V]:	220 - 240
LED lifespan L70B50 [h]:	109000
LED lifespan L80B20 [h]:	69000
LED lifespan L90B10 [h]:	34000
Product line:	1140
Impact resistance:	IK06
CE certificate:	237/2023
ENEC Certificate:	PL BBJ/003/2022/M1/A1
PZH certificate:	B-BK-60212-0109/21
Warranty [years]:	5
Manual:	Download PDF
Category of application:	office lighting
Plik LDT:	Download

LIGHT CURVES



Card creation date: 28 October 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



