

# EXPO SYSTEM LED FI 85 2500LM 36ST KL. I IP20 WHITE 940 (28W)

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	254703
<b>Ingress protection:</b>	IP20
<b>Nominal power [W]:</b>	28
<b>Luminous flux [lm]*:</b>	2500
<b>Colour temperature [K]:</b>	4000
<b>Electrical protection class:</b>	I
<b>Energy efficiency class:</b>	F
<b>Colour of the body:</b>	white
<b>Diffuser type:</b>	lens
<b>Beam angle [°]:</b>	36

## CHARACTERISTICS

High quality aluminum projector with LED COB light source. Universal application with track system. Lack of ultraviolet emission or infrared radiation, high color rendering index, high luminous efficacy and durability. Immediate ignition without flicker makes it the best replacement for metal halide or halogen sources projectors. Optional specialized filters to highlight meat stands, bread or vegetables. Version CRI (Ra) > 90 available on request.

## APPLICATION

Possible use of specialized filters to highlight food stands. As accentuating lighting in commercial buildings, museums, exhibition halls and offices. For connection with track systems in the color of the projector


# EXPO SYSTEM LED FI 85 2500LM 36ST KL. I IP20 WHITE 940 (28W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Nominal power [W]:	28	Dimensions (H/W/T/S) [mm]:	Ø85/255mm
Light source:	LED module	Ingress protection:	IP20
Colour temperature [K]:	4000	Mounting version:	track, surface
Luminous flux [lm]:	2500	Working temperature [°C]:	from -20 to +35
Rated power of the luminaire [W]:	29	Tilt angle adjustment [°]:	355
Diffuser type:	lens	Net weight [kg]:	1.100
Supply voltage [V]:	220-240	CE certificate:	<a href="#">45/2020</a>
Beam angle [°]:	36	Index:	254703
Frequency [Hz]:	50 - 60	EAN:	5905963254703
Colour rendering index:	>90	Category type:	spotlight
Colour of the body:	white	ETIM class:	EC001744
Luminous efficacy [lm/W]:	89	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Energy efficiency class:	F	Warranty [years]:	2
Electrical protection class:	I	Manual:	<a href="#">Download PDF</a>
Diffuser material:	PMMA	Plik LDT:	<a href="#">Download</a>
Material of the body:	aluminium		

## LIGHT CURVES

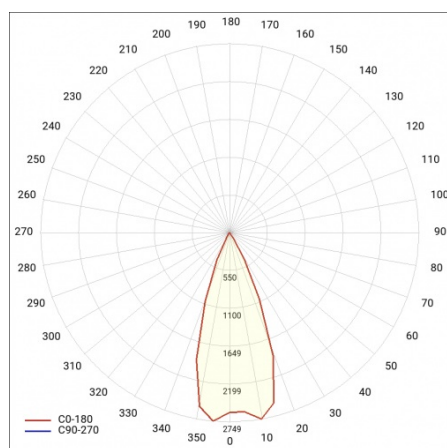

# EXPO SYSTEM LED FI 85 2500LM 36ST KL. I IP20 WHITE 940 (28W)

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
255106	EXPO SYSTEM LED surface mounting base black
255113	EXPO SYSTEM LED surface mounting base white
255120	EXPO SYSTEM LED honeycomb



EXPO SYSTEM LED surface mounting  
base black (255106)



EXPO SYSTEM LED surface mounting  
base white (255113)



EXPO SYSTEM LED  
honeycomb (255120)

Card creation date: 10 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 45/2020