

# SQ 160 LED PLUS N 1700LM 830 IP33 II CL. AW3H MAT (17W)

DETAILED CARD



## TECHNICAL PARAMETERS

---

<b>Index:</b>	572357
<b>Ingress protection:</b>	IP33
<b>Impact resistance:</b>	IK08
<b>Nominal power [W]:</b>	17
<b>Luminous flux [lm]*:</b>	1700
<b>Colour temperature [K]:</b>	3000
<b>Color rendering index (Ra) &gt;:</b>	80
<b>SDCM:</b>	3
<b>Electrical protection class:</b>	II
<b>Energy efficiency class:</b>	F

## CHARACTERISTICS

---

SQ 160 LED PLUS N is a new line of square luminaires. The construction, designed from scratch, introduces new solutions ensuring excellent lighting parameters. The body is made of plastic, therefore it is characterized by low weight. The diffuser provides excellent light transmission. The integrated LED module guarantees low power consumption and all the advantages of modern LED light sources.

## APPLICATION

---

Surface-mounted luminaire is especially recommended for offices, spacious corridors and public spaces.


# SQ 160 LED PLUS N 1700LM 830 IP33 II CL. AW3H MAT (17W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	572357	Dimensions (H/W/T/S) [mm]:	162/162/86
EAN:	5905963572357	Mounting dimensions [mm]:	113,5
Nominal power [W]:	17	Impact resistance:	IK08
Supply voltage [V]:	220 - 240	Ingress protection:	IP33
Frequency [Hz]:	50 - 60	Mounting version:	surface
Luminous flux [lm]:	1700	Working temperature [°C]:	od -20 do +35
Luminous efficacy [lm/W]:	90	Emergency lighting [h]:	3
Energy efficiency class:	F	Net weight [kg]:	1.100
Electrical protection class:	II	Category type:	downlights
Colour temperature [K]:	3000	LED lifespan L70B50 [h]:	150000
Color rendering index (Ra) >:	80	LED lifespan L80B10 [h]:	100000
SDCM:	3	LED lifespan L90B10 [h]:	50000
Power factor:	0.99	Photobiological safety:	RG0 - exempt (no photobiological hazard)
Beam angle [°]:	110	Warranty [years]:	2 / 0,5 (battery)
Diffuser material:	PC	CE certificate:	<a href="#">13/2024</a>
Diffuser type:	matt	Environmental Product Declaration (EPD):	<a href="#">944/2026</a>
Material of the body:	ABS	Manual:	<a href="#">Download PDF</a>
Colour of the body:	white	ISO Certificates:	9001:2015. 14001:2015. 45001:2018. 50001:2018

## LIGHT CURVES

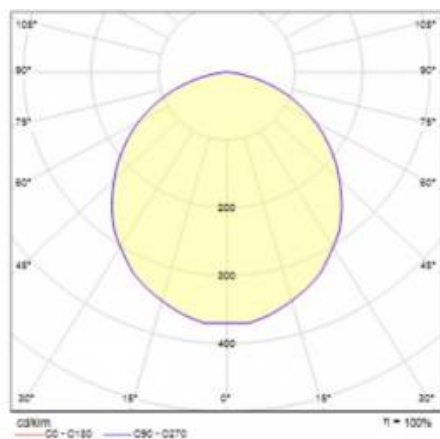

# SQ 160 LED PLUS N 1700LM 830 IP33 II CL. AW3H MAT (17W)

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
573743	Suspension SQ160 157x157mm black ON/OFF. DALI

Card creation date: 30 April 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 13/2024



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl