


# SQ 160 LED PLUS N 1900LM 830 IP33 II CL. AW3H 75DEG (17W)

DETAILED CARD

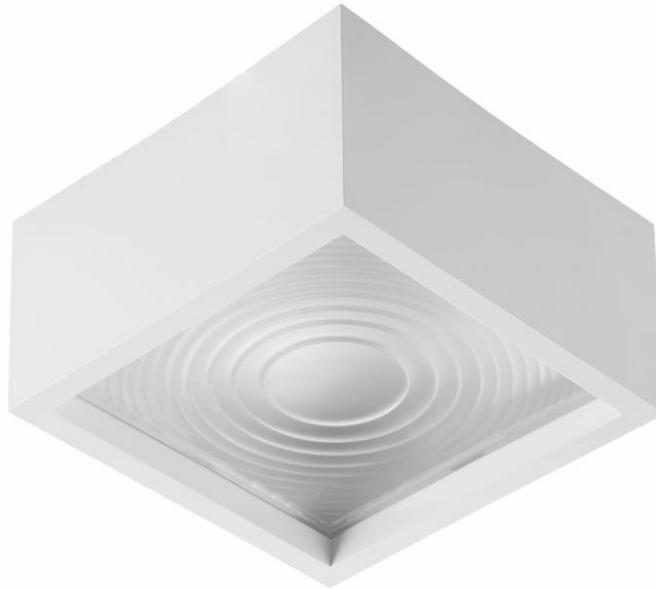

## TECHNICAL PARAMETERS

<b>Index:</b>	572418
<b>Ingress protection:</b>	IP33
<b>Impact resistance:</b>	IK08
<b>Nominal power [W]:</b>	17
<b>Luminous flux [lm]*:</b>	1900
<b>Colour temperature [K]:</b>	3000
<b>Color rendering index (Ra) &gt;:</b>	80
<b>SDCM:</b>	3
<b>Electrical protection class:</b>	II
<b>Energy efficiency class:</b>	E

## CHARACTERISTICS

SQ 160 LED PLUS N is a new line of square luminaires. The construction, designed from scratch, introduces new solutions ensuring excellent lighting parameters. The body is made of plastic, therefore it is characterized by low weight. The diffuser provides excellent light transmission. The integrated LED module guarantees low power consumption and all the advantages of modern LED light sources.

## APPLICATION

Surface-mounted luminaire is especially recommended for offices, spacious corridors and public spaces.


# SQ 160 LED PLUS N 1900LM 830 IP33 II CL. AW3H 75DEG (17W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	572418	Colour of the body:	white
EAN:	5905963572418	Dimensions (H/W/T/S) [mm]:	162/162/86
Nominal power [W]:	17	Mounting dimensions [mm]:	113,5
Supply voltage [V]:	220 - 240	Impact resistance:	IK08
Frequency [Hz]:	50 - 60	Ingress protection:	IP33
Luminous flux [lm]:	1900	Mounting version:	surface
Luminous efficacy [lm/W]:	101	Working temperature [°C]:	od -20 do +35
Energy efficiency class:	E	Emergency lighting [h]:	3
Electrical protection class:	II	Net weight [kg]:	1.100
Colour temperature [K]:	3000	Warranty [years]:	2 / 0,5 (battery)
Color rendering index (Ra) >:	80	Category type:	downlights
SDCM:	3	LED lifespan L70B50 [h]:	132000
Power factor:	0.99	LED lifespan L80B10 [h]:	84000
Beam angle [°]:	75	LED lifespan L90B10 [h]:	42000
Diffuser material:	PC	CE certificate:	<a href="#">13/2024</a>
Diffuser type:	OPAL	Manual:	<a href="#">Download PDF</a>
Material of the body:	ABS	Photobiological safety:	RG0 - exempt (no photobiological hazard)

## LIGHT CURVES

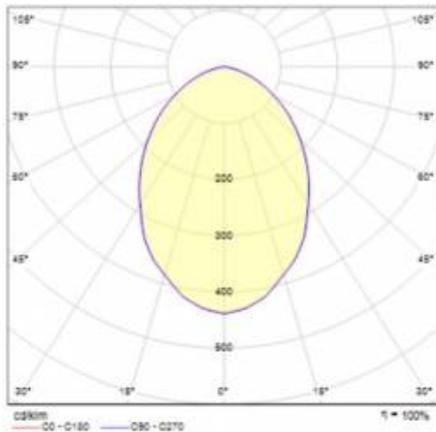

# SQ 160 LED PLUS N 1900LM 830 IP33 II CL. AW3H 75DEG (17W)

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
573743	Suspension SQ160 157x157mm black ON/OFF. DALI

Card creation date: 09 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 13/2024



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl