

# SQ 160 LED PLUS P 2050LM DALI 840 IP44/20 II CL. 75DEG (17W)

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	572005
<b>Ingress protection:</b>	IP44/IP20
<b>Impact resistance:</b>	IK08
<b>Nominal power [W]:</b>	17
<b>Luminous flux [lm]*:</b>	2050
<b>Colour temperature [K]:</b>	4000
<b>Colour rendering index:</b>	>80
<b>SDCM:</b>	≤ 3
<b>Electrical protection class:</b>	II
<b>Energy efficiency class:</b>	E

## CHARACTERISTICS

SQ 160 LED PLUS P is a new line of square luminaires. The construction, designed from scratch, introduces new solutions ensuring excellent lighting parameters. The body is made of plastic, therefore it is characterized by low weight. The diffuser provides excellent light transmission. The integrated LED module guarantees low power consumption and all the advantages of modern LED light sources.

## APPLICATION

Recessed-mounted luminaire with the possibility of flush mounting in modular ceilings and in plasterboard ceilings (using plasterboard recessing kit) is especially recommended for offices, spacious corridors and public spaces.


# SQ 160 LED PLUS P 2050LM DALI 840 IP44/20 II CL. 75DEG (17W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	572005	Dimensions (H/W/T/S) [mm]:	158/158/78
Nominal power [W]:	17	Mounting dimensions [mm]:	145/145
Supply voltage [V]:	220 - 240	Impact resistance:	IK08
Frequency [Hz]:	50 - 60	Ingress protection:	IP44/IP20
Luminous flux [lm]:	2050	Mounting version:	recessed
Luminous efficacy [lm/W]:	109	Working temperature [°C]:	-20 do +35
Energy efficiency class:	E	Control:	DALI
Electrical protection class:	II	Net weight [kg]:	0.340
Colour temperature [K]:	4000	Warranty [years]:	5
Colour rendering index:	>80	Category type:	downlights
SDCM:	≤ 3	LED lifespan L70B50 [h]:	132000
Power factor:	0.99	LED lifespan L80B20 [h]:	84000
Beam angle [°]:	75	LED lifespan L90B10 [h]:	42000
Diffuser material:	PC	DIMM DALI:	yes
Diffuser type:	OPAL	CE certificate:	<a href="#">14/2024</a>
Material of the body:	ABS	Manual:	<a href="#">Download PDF</a>
Colour of the body:	white	Photobiological safety:	RG0 - exempt (no photobiological hazard)

## LIGHT CURVES

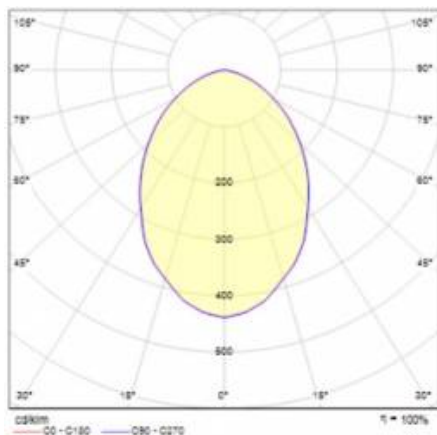

Card creation date: 19 August 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 14/2024



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl