

# RQ 160 LED PLUS P 2750LM DALI 840 IP44/20 II CL. 75DEG (21W)

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	571497
<b>Ingress protection:</b>	IP44/20
<b>Impact resistance:</b>	IK08
<b>Rated power of the luminaire [W]*:</b>	22
<b>Luminous flux [lm]*:</b>	2750
<b>Colour temperature [K]:</b>	4000
<b>Colour rendering index:</b>	>80
<b>SDCM:</b>	≤ 3
<b>Electrical protection class:</b>	II
<b>Energy efficiency class:</b>	D

## CHARACTERISTICS

RQ 160 LED PLUS P is a new line of round luminaires. The construction, designed from scratch, introduces new solutions ensuring excellent lighting parameters. The body is made of plastic, therefore it is characterized by low weight. The diffuser provides excellent light transmission. The integrated LED module guarantees low power consumption and all the advantages of modern LED light sources.

## APPLICATION

Recessed-mounted luminaire with the possibility of flush mounting in modular ceilings and in plasterboard ceilings (using plasterboard recessing kit) is especially recommended for offices, spacious corridors and public spaces.


# RQ 160 LED PLUS P 2750LM DALI 840 IP44/20 II CL. 75DEG (21W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	571497	Colour of the body:	white
Rated power of the luminaire [W]:	22	Dimensions (H/W/T/S) [mm]:	162/70
EAN:	5905963571497	Mounting dimensions [mm]:	ø150
Luminous flux [lm]:	2750	Impact resistance:	IK08
Colour temperature [K]:	4000	Ingress protection:	IP44/20
Diffuser type:	OPAL	Mounting version:	recessed
Supply voltage [V]:	220 - 240	Working temperature [°C]:	-20 do +35
Beam angle [°]:	75	Net weight [kg]:	0.340
Frequency [Hz]:	50 - 60	Category type:	downlights
Control:	DALI	LED lifespan L70B50 [h]:	132000
Luminous efficacy [lm/W]:	125	LED lifespan L80B20 [h]:	84000
Energy efficiency class:	D	LED lifespan L90B10 [h]:	42000
Electrical protection class:	II	DIMM DALI:	yes
Colour rendering index:	>80	Photobiological safety:	RG0 - exempt (no photobiological hazard)
SDCM:	≤ 3	Warranty [years]:	5
Power factor:	0.99	CE certificate:	<a href="#">322/2023</a>
Diffuser material:	PC	Manual:	<a href="#">Download PDF</a>
Material of the body:	ABS	Plik LDT:	<a href="#">Download</a>

## LIGHT CURVES

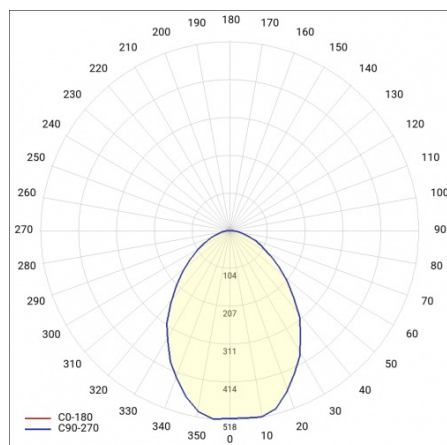

Card creation date: 09 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 322/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)