

# DOT CS 1W 3H NM AT

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Ingress protection:</b>	IP65
<b>Nominal power [W]:</b>	1
<b>Luminous flux [lm]*:</b>	130
<b>Colour temperature [K]:</b>	5000
<b>Electrical protection class:</b>	II
<b>Material of the body:</b>	PC
<b>Mounting version:</b>	surface
<b>CNBOP certificate:</b>	4958/2023
<b>Warranty [years]:</b>	2 / 0.5 (bateria)
<b>Energy efficiency class:</b>	D

## CHARACTERISTICS

Surface-mounted autonomous emergency luminaire with integrated, energy-saving LED light panel. Body made of polycarbonate (PC). Optical system available in 3 variants: basic, corridor, open space. Luminaire is fitted with batteries with 1h, 2h or 3h emergency operation time. The luminaire is using Ni-Mh or Ni-Cd battery with voltage of 3.6V and 24 hours of full charge with manual or automatic test function (AT).

## APPLICATION

Autonomous emergency luminaire is mainly used for illumination of escape routes and fire protection devices after power failure, i.e. in emergency mode. Especially recommended everywhere, where it is necessary to install emergency lighting within the scope of modernization of existing system. Successfully replaces luminaires with embedded emergency module. Due to additional sealing, the luminaire achieves IP65 tightness and may be used in places with increased humidity or outdoors under the roofing.


# DOT CS 1W 3H NM AT

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Light source:	LED module	Impact resistance:	IK07
Nominal power [W]:	1	Mounting version:	surface
Rated power of the luminaire [W]:	1	Working temperature [°C]:	from +5 to +35
Supply voltage [V]:	220-240	Emergency lighting [h]:	3
Frequency [Hz]:	50 - 60	Index:	550140
Luminous flux [lm]:	130	EAN:	5905963550140
Luminous efficacy [lm/W]:	134	Category type:	emergency lighting
Electrical protection class:	II	Version:	general
Colour temperature [K]:	5000	Autotest:	yes
Colour rendering index:	>70	Operating mode:	NM
LED lifespan L70B50 [h]:	275000	Light distribution type:	general
Beam angle [°]:	120	ETIM class:	EC001957
Battery:	NiMh	Photobiological safety:	RG0 - exempt (no photobiological hazard)
Diffuser material:	PMMA	Luminaire rated power $O_{min}$ [W]:	1
Material of the body:	PC	Energy efficiency class:	D
Colour of the body:	white	Warranty [years]:	2 / 0.5 (bateria)
Dimensions (H/W/T/S) [mm]:	ø140/40	CE certificate:	<a href="#">112/2023</a>
Mounting dimensions [mm]:	104	Manual:	<a href="#">Download PDF</a>
Ingress protection:	IP65		

## LIGHT CURVES

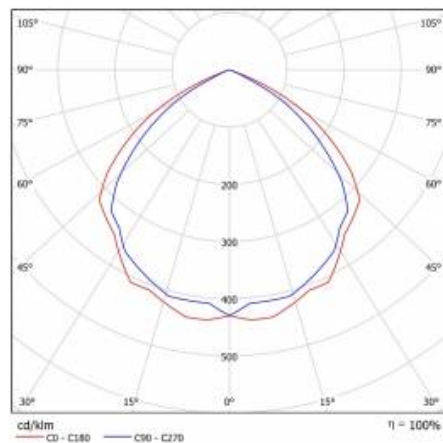

# DOT CS 1W 3H NM AT

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
545672	DOT CS galvanized steel arm
551161	Ceiling spacer DOT white matt



DOT CS galvanized steel arm (545672)



Ceiling spacer DOT white matt (551161)

Card creation date: 21 October 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 112/2023