

# QUEST 2 LED M 5200LM I CL. IP66 840 SP10KV (41W)

## DETAILED CARD



### TECHNICAL PARAMETERS

Index:	699023
Ingress protection:	IP66
Impact resistance:	IK09
Rated power of the luminaire [W]*:	41
Luminous flux [lm]*:	5200
Colour temperature [K]:	4000
Colour rendering index:	80
SDCM:	≤ 3
Electrical protection class:	I
Energy efficiency class:	D

### CHARACTERISTICS

High-quality floodlight with inbuilt LED source. The body is made of die-cast aluminium, powder coated in anthracite grey (RAL 7016), and the mounting bracket is made of black-painted steel. The diffuser is made of 5 mm thick tempered glass. It is equipped with directional lens matrices with 3 different light distributions: symmetrical (120°), asymmetric narrow ASN and asymmetric wide ASW. Non-corrosive mounting bracket allowing for adjustment angles between -140° to +185°. The luminaire is available in 2 sizes: M and L. Standard equipped with 0.1m long H07RN-F cable and IP66 quick connector. Wide range of accessories available: protective net, grip for the lighting pole, wall bracket.

### APPLICATION

The fitting is dedicated for lighting elevations and billboards.


# QUEST 2 LED M 5200LM I CL. IP66 840 SP10KV (41W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	699023	Dimensions (H/W/T/S) [mm]:	321/424/37
Light source:	LED	Impact resistance:	IK09
Rated power of the luminaire [W]:	41	Ingress protection:	IP66
Supply voltage [V]:	220 - 240	Mounting version:	surface
Frequency [Hz]:	50 - 60	Working temperature [°C]:	from -20 to +35
Luminous flux [lm]:	5200	Lateral surface (SCx) [m2]:	0.140
Luminous efficacy [lm/W]:	127	Net weight [kg]:	4.200
Energy efficiency class:	D	LED lifespan L70B50 [h]:	125000
Electrical protection class:	I	LED lifespan L80B20 [h]:	79000
Colour temperature [K]:	4000	LED lifespan L90B10 [h]:	38000
Colour rendering index:	80	Cable length [m]:	0.90
SDCM:	≤ 3	Mark D:	yes
Beam angle [°]:	120	Additional accessories:	protective grid, pole mount, wall mount
Light distribution type:	symmetric 120°	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Surge protection [kV]:	10	Warranty [years]:	5
Diffuser material:	glass	CE certificate:	<a href="#">86/2021</a>
Diffuser type:	transparent	PZH certificate:	<a href="#">B-BK-60212-0480/21</a>
Material of the body:	aluminium	Environmental Product Declaration (EPD):	<a href="#">816/2025</a>
Colour of the body:	anthracite grey	Manual:	<a href="#">Download PDF</a>
The number of implement units:	1	Plik LDT:	<a href="#">Download</a>
Version:	M		

## LIGHT CURVES

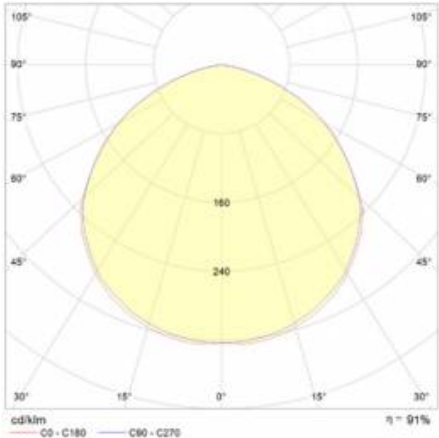

# QUEST 2 LED M 5200LM I CL. IP66 840 SP10KV (41W)

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
559938	QUEST PLUS LED M/L wall holder RAL9006
699993	QUEST 2 LED M - recessed frame
699986	QUEST 2 LED L - recessed frame
699962	QUEST 2 LED L protective grid RAL7016
699979	QUEST 2 LED M protective grid RAL7016
965913	QUEST 2 LED M/L MAX wall mount RAL7016
567728	QUEST 2 LED M/L Pole holder



QUEST PLUS LED M/L wall holder  
RAL9006 (559938)



QUEST 2 LED M - recessed  
frame (699993)




QUEST 2 LED L - recessed  
frame (699986)




QUEST 2 LED L protective grid  
RAL7016 (699962)



QUEST 2 LED M protective grid  
RAL7016 (699979)

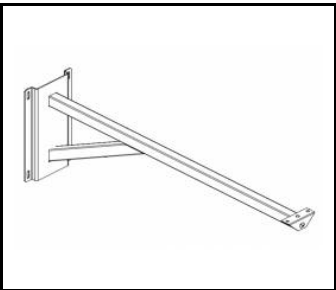

QUEST 2 LED M/L MAX wall mount  
RAL7016 (965913)

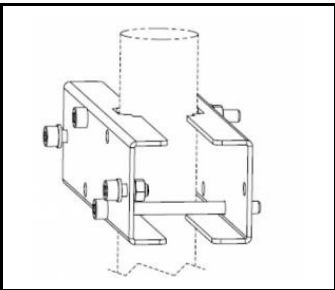

QUEST 2 LED M/L Pole  
holder (567728)

Card creation date:10 July 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 86/2021



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl