
# SOLANTO Z 900MM 3340LM 830 IP20 I CL. DALI OPAL BLACK 53W

DETAILED CARD

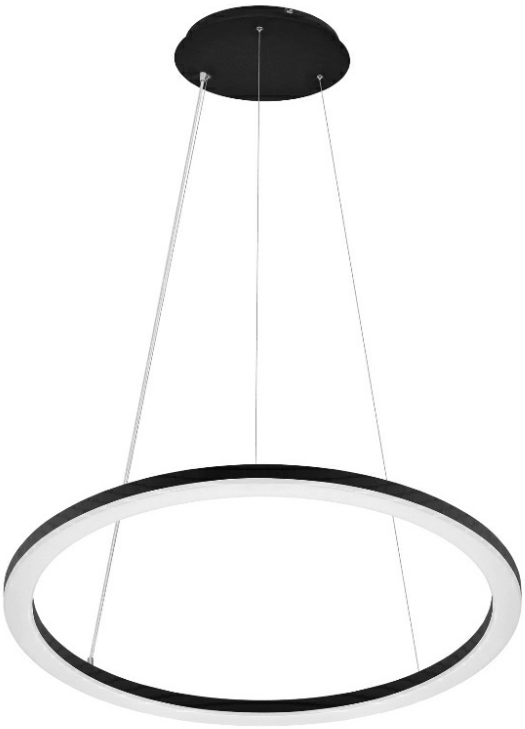

## TECHNICAL PARAMETERS

| | |
|---|---|
| **Light source:** | LED module |
| **Rated power [W] - range:** | 53 |
| **Colour temperature [K]:** | 3000 |
| **Luminous flux of the luminaire [lm] - range:** | 3340 |
| **Ingress protection:** | IP20 |
| **Electrical protection class:** | I |
| **Diffuser material:** | PS |
| **Diffuser type:** | OPAL |
| **Colour of the body:** | black |

## CHARACTERISTICS

Suspended or surface-mounted ring-shaped LED luminaire, allowing for an attractive arrangement of representative interiors. The luminaire is made of steel powder coated in white, black or other color to fit the character of the interior. The milky diffuser made with thermoforming method emphasises the decorative character of the luminaire. The pendant option includes a complete pendant system with a central box.

Multi LED versions allow you to choose from 4 flux and power settings increasing the versatility and functionality of the luminaire, while reducing the number of indexes to the necessary minimum.

## APPLICATION

SOLANTO is an extremely glamorous pendant or surface mounted luminaire, dedicated to such interiors as lobbies, receptions, shopping malls, showrooms. It can be also used in apartments and apartments, perfectly fitting into stylish surroundings.

# SOLANTO Z 900MM 3340LM 830 IP20 I CL. DALI OPAL BLACK 53W

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

| | |
|---|---|
| **Index:** | 463471 |
| **EAN:** | 5905963463471 |
| **Light source:** | LED module |
| **Rated power [W] - range:** | 53 |
| **Luminous flux of the luminaire [lm] - range:** | 3340 |
| **Supply voltage [V]:** | 220 - 240 |
| **Frequency [Hz]:** | 50 - 60 |
| **Luminous efficacy [lm/W]:** | 63 |
| **Energy efficiency class:** | F |
| **Electrical protection class:** | I |
| **Colour temperature [K]:** | 3000 |
| **Color rendering index (Ra) >:** | 80 |
| **SDCM:** | 3 |
| **LED lifespan L70B50 [h]:** | 112000 |
| **LED lifespan L80B10 [h]:** | 70 000 |
| **LED lifespan L90B10 [h]:** | 34000 |
| **Working temperature [°C]:** | from 0 to +35 |

| | |
|---|---|
| **Diffuser material:** | PS |
| **Diffuser type:** | OPAL |
| **Material of the body:** | Steel |
| **Colour of the body:** | black |
| **Ring colour:** | black |
| **Dimensions (H/W/T/S) [mm]:** | ø900/32 |
| **Ingress protection:** | IP20 |
| **Mounting version:** | suspended |
| **DIMM DALI:** | yes |
| **Cable length [m]:** | 1 |
| **Net weight [kg]:** | 4.080 |
| **Warranty [years]:** | 5 |
| **CE certificate:** | 218/2023 |
| **Manual:** | Download PDF |
| **ISO Certificates:** | 9001:2015, 14001:2015, 45001:2018, 50001:2018 |
| **Plik LDT:** | Download |

Card creation date: 24 July 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 218/2023

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl