
## SOLANTO MULTI N 600MM 1890-3330LM 830 IP20 I CL. OPAL BLACK 30-53W

**DETAILED CARD** 



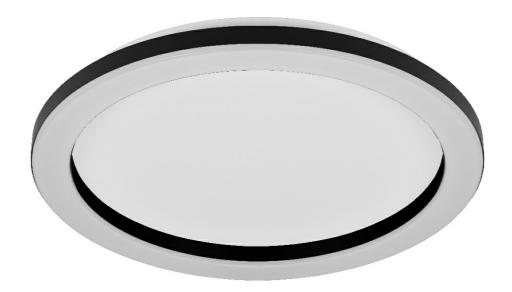

### **TECHNICAL PARAMETERS**

**Light source:** LED module

**Rated power [W] - range:** 30/38/45/53

Colour temperature [K]: 3000

Luminous flux of the luminaire [lm] -

range:

1890/2400/2800/3330

Ingress protection: IP20

Electrical protection class:

Diffuser material: PS

**Diffuser type:** OPAL

Colour of the body: black

#### **CHARACTERISTICS**

Suspended or surface-mounted ring-shaped LED luminaire, allowing for an attractive arrangement of representative interiors. The luminaire is made of steel powder coated in white, black or other color to fit the character of the interior. The milky diffuser made with thermoforming method emphasises the decorative character of the luminaire. The pendant option includes a complete pendant system with a central box.

Multi LED versions allow you to choose from 4 flux and power settings increasing the versatility and functionality of the luminaire, while reducing the number of indexes to the necessary minimum.

#### **APPLICATION**

SOLANTO is an extremely glamorous pendant or surface mounted luminaire, dedicated to such interiors as lobbies, receptions, shopping malls, showrooms. It can be also used in apartments and apartments, perfectly fitting into stylish surroundings.



# SOLANTO MULTI N 600MM 1890-3330LM 830 IP20 I CL. OPAL BLACK 30-53W

**DETAILED CARD** 

#### **TECHNICAL PARAMETERS TABLE**

Index:	463136
EAN:	5905963463136
Light source:	LED module
Rated power [W] - range:	30/38/45/53
Luminous flux of the luminaire [lm] - range:	1890/2400/2800/3330
Supply voltage [V]:	220 - 240
Frequency [Hz]:	50 - 60
Luminous efficacy [lm/W]:	63
Energy efficiency class:	F
Electrical protection class:	1
Colour temperature [K]:	3000
Color rendering index (Ra) >:	80
SDCM:	3
LED lifespan L70B50 [h]:	112000
LED lifespan L80B20 [h]:	70 000

LED lifespan L90B10 [h]:	34000
Diffuser material:	PS
Diffuser type:	OPAL
Material of the body:	Steel
Colour of the body:	black
Ring colour:	black
Dimensions (H/W/T/S) [mm]:	ø602/68
Ingress protection:	IP20
Mounting version:	surface
Net weight [kg]:	3.650
Warranty [years]:	5
CE certificate:	<u>217/2023</u>
Manual:	Download PDF
Plik LDT:	<u>Download</u>

Card creation date: 14 November 2025



