
SOLANTO MULTI Z 600MM 2550-4500LM 830 IP20 I CL. OPAL WHITE 30-53W

DETAILED CARD

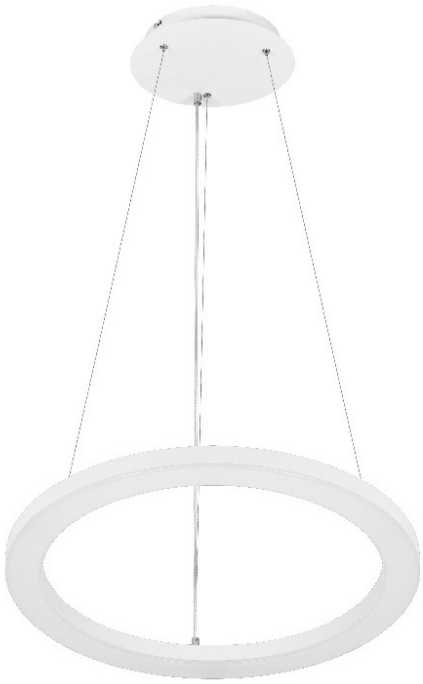

TECHNICAL PARAMETERS

Light source:	LED module
Rated power [W] - range:	30/38/45/53
Colour temperature [K]:	3000
Luminous flux of the luminaire [lm] - range:	2550/3200/3800/4500
Ingress protection:	IP20
Electrical protection class:	I
Diffuser material:	PS
Diffuser type:	OPAL
Colour of the body:	white

CHARACTERISTICS

Suspended or surface-mounted ring-shaped LED luminaire, allowing for an attractive arrangement of representative interiors. The luminaire is made of steel powder coated in white, black or other color to fit the character of the interior. The milky diffuser made with thermoforming method emphasises the decorative character of the luminaire. The pendant option includes a complete pendant system with a central box.

Multi LED versions allow you to choose from 4 flux and power settings increasing the versatility and functionality of the luminaire, while reducing the number of indexes to the necessary minimum.

APPLICATION

SOLANTO is an extremely glamorous pendant or surface mounted luminaire, dedicated to such interiors as lobbies, receptions, shopping malls, showrooms. It can be also used in apartments and apartments, perfectly fitting into stylish surroundings.

SOLANTO MULTI Z 600MM 2550-4500LM 830 IP20 I CL. OPAL WHITE 30-53W

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	463075
EAN:	5905963463075
Light source:	LED module
Rated power [W] - range:	30/38/45/53
Luminous flux of the luminaire [lm] - range:	2550/3200/3800/4500
Supply voltage [V]:	220 - 240
Frequency [Hz]:	50 - 60
Luminous efficacy [lm/W]:	85
Energy efficiency class:	E
Electrical protection class:	I
Colour temperature [K]:	3000
Color rendering index (Ra) >:	80
SDCM:	3
LED lifespan L70B50 [h]:	112000
LED lifespan L80B10 [h]:	70 000
LED lifespan L90B10 [h]:	34000

Working temperature [°C]:	from 0 to +35
Diffuser material:	PS
Diffuser type:	OPAL
Material of the body:	Steel
Colour of the body:	white
Ring colour:	white
Dimensions (H/W/T/S) [mm]:	ø602/32
Ingress protection:	IP20
Mounting version:	suspended
Cable length [m]:	1.20
Net weight [kg]:	2.350
Warranty [years]:	5
CE certificate:	218/2023
Manual:	Download PDF
ISO Certificates:	9001:2015, 14001:2015, 45001:2018, 50001:2018
Plik LDT:	Download

Card creation date: 24 July 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 218/2023

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl