

# ASTRA LED BASIC VD 7050LM 840 IP66 I CL. SP10KV 65W

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Ingress protection:</b>	IP66
<b>Impact resistance:</b>	IK08
<b>Rated power of the luminaire [W]*:</b>	65
<b>Luminous flux [lm]*:</b>	7050
<b>Colour temperature [K]:</b>	4000
<b>SDCM:</b>	≤ 5
<b>Colour rendering index:</b>	>80
<b>Electrical protection class:</b>	I
<b>Energy efficiency class:</b>	E
<b>Material of the body:</b>	PP 35%GF

## CHARACTERISTICS

Streetlight LED fitting with high luminous flux (max 116 lm/W) and an integrated energy-saving LED module. The self-cleaning body made of polypropylene (PP) with fibreglass (FG) and the grip made of aluminium. Thanks to the directional lens (made of PC), the light distribution meets the requirements of PN-EN 13201 lighting class. IP66 ingress protection class and IK08 impact-rating features make this fitting extremely tight and shock-resistant (vandal-resistant). Integrated, step-regulated grip allows to set the fitting by 5 degrees in the range of: -5° to +15° (peak to pole); -15° to +5° (side to boom).

## APPLICATION

Streetlight fitting used in open spaces to lighten: streets, local roads, bicycle paths, alleys, pavements, car parks and squares. Installation and Mounting: lateral side entry, post-top mounting. Mounting grip integrated with the fitting.


# ASTRA LED BASIC VD 7050LM 840 IP66 I CL. SP10KV 65W

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	664755	Colour of the body:	grey
Rated power of the luminaire [W]:	65	Mounting version:	side, top
Colour temperature [K]:	4000	Working temperature [°C]:	from -40 to +35
Light source:	LED module	Tilt angle adjustment [°]:	od -5 do +15
Luminous flux [lm]:	7050	Lateral surface (SCx) [m2]:	0.018
Luminous efficacy [lm/W]:	101	Wire type:	H07RN-F
Energy efficiency class:	E	Cable length [m]:	0.50
Electrical protection class:	I	Protection type:	10
Colour rendering index:	>80	Number on the palette [pcs]:	62
SDCM:	≤ 5	Net weight [kg]:	1.900
Power factor:	0.93	Category of application:	Street lighting
Diffuser type:	matrix led	LED lifespan L70B50 [h]:	120000
Diffuser colour:	transparent	LED lifespan L80B20 [h]:	75000
Optics material:	PC	LED lifespan L90B10 [h]:	36000
Optics:	matrix lens	Light distribution type:	uliczny
Material of the body:	PP 35%GF	Manual:	<a href="#">Download PDF</a>
Dimensions (H/W/T/S) [mm]:	640/113/233	CE certificate:	<a href="#">52/2021</a>
Mounting dimensions [mm]:	ø60	Warranty [years]:	5
Ingress protection:	IP66	Plik LDT:	<a href="#">Download</a>
Impact resistance:	IK08		

## LIGHT CURVES

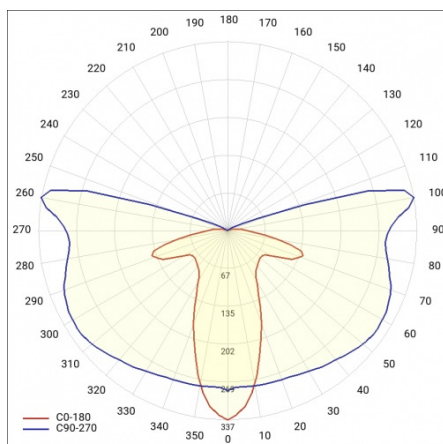

# ASTRA LED BASIC VD 7050LM 840 IP66 I CL. SP10KV 65W

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
UL00229	mounting grip 78 mm



mounting grip 78 mm (UL00229)

Card creation date: 13 March 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 52/2021