


# ELEGANTE SYSTEM LED CONNECTOR L 315X315MM

## 1200LM OPAL DALI IP40 830 (15W)

DETAILED CARD

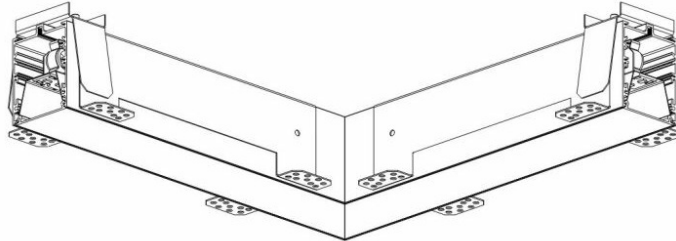

### TECHNICAL PARAMETERS

|                                 |           |
|---------------------------------|-----------|
| <b>Index:</b>                   | 388378    |
| <b>Ingress protection:</b>      | IP40/20   |
| <b>Impact resistance:</b>       | IK04      |
| <b>Nominal power [W]:</b>       | 15        |
| <b>Luminous flux [lm]*:</b>     | 1200      |
| <b>Colour temperature [K]:</b>  | 3000      |
| <b>SDCM:</b>                    | ≤ 3       |
| <b>Energy efficiency class:</b> | G         |
| <b>Material of the body:</b>    | aluminium |
| <b>Colour of the body:</b>      | silver    |

### CHARACTERISTICS

ELEGANTE LED SYSTEM is a modern office fixture designed for flush mounting. It provides a combination of high light parameters and a modern decorative effect. The optical design has been designed using an iridescent diaphragm with high permeability and uniform light distribution. Available system switches allow for the design of concealed light lines in various configurations (T, X, L). The advantage of the system's roofs is the lampshade without connections to max. length 25m.

There is also a version of individual fittings.

Available 2 power options - to connect as part of:

- 16W i 8W,
- 30W i 15W.

Assembly should be carried out by qualified person.

Please feel free to contact our lighting designers.

### APPLICATION

The luminaire is dedicated for internal use. For use in office and commercial facilities, in particular in representative rooms.

# ELEGANTE SYSTEM LED CONNECTOR L 315X315MM

## 1200LM OPAL DALI IP40 830 (15W)

DETAILED CARD

### TECHNICAL PARAMETERS TABLE

|  |             |                                  |   |
|--|-------------|----------------------------------|---|
| <b>Nominal power [W]:</b>                | 15          | <b>Colour of the body:</b>       | silver  |
| <b>Light source:</b>                     | LED module  | <b>Mounting dimensions [mm]:</b> | 315/55/315/55   |
| <b>Colour temperature [K]:</b>           | 3000        | <b>Impact resistance:</b>        | IK04  |
| <b>Luminous flux [lm]:</b>               | 1200        | <b>Mounting version:</b>         | recessed  |
| <b>Rated power of the luminaire [W]:</b> | 18.46       | <b>Working temperature [°C]:</b> | from -20 to +35   |
| <b>Diffuser type:</b>                    | OPAL        | <b>Accessories included:</b>     | diffuser  |
| <b>Supply voltage [V]:</b>               | 220-240     | <b>Through wiring:</b>           | 5x2.5   |
| <b>DIMM DALI:</b>                        | yes         | <b>Net weight [kg]:</b>          | 1.600   |
| <b>Frequency [Hz]:</b>                   | 50 - 60     | <b>Gross weight [kg]:</b>        | 1.900   |
| <b>Version:</b>                          | L connector | <b>Index:</b>                    | 388378  |
| <b>Source luminous flux [lm]*:</b>       | 2304        | <b>EAN:</b>                      | 5905963388378   |
| <b>Dimensions (H/W/T/S) [mm]:</b>        | 315/315/65  | <b>Category type:</b>            | systems   |
| <b>Ingress protection:</b>               | IP40/20     | <b>Product line:</b>             | SYSTEM 30W/15W  |
| <b>Luminous efficacy [lm/W]:</b>         | 65          | <b>Light distribution type:</b>  | open space  |
| <b>Energy efficiency class:</b>          | G           | <b>Kolejność:</b>                | D   |
| <b>Electrical protection class:</b>      | I           | <b>ETIM class:</b>               | EC000282  |
| <b>Colour rendering index:</b>           | >80         | <b>CE certificate:</b>           | <a href="#">244/2023</a>  |
| <b>SDCM:</b>                             | ≤ 3         | <b>Photobiological safety:</b>   | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| <b>Power factor:</b>                     | 0.91        | <b>Warranty [years]:</b>         | 5   |
| <b>Diffuser material:</b>                | PC          | <b>Manual:</b>                   | <a href="#">Download PDF</a>  |
| <b>Diffuser colour:</b>                  | white       | <b>Plik LDT:</b>                 | <a href="#">Download</a>  |
| <b>Material of the body:</b>             | aluminium   |                                  |   |

# ELEGANTE SYSTEM LED CONNECTOR L 315X315MM

## 1200LM OPAL DALI IP40 830 (15W)

DETAILED CARD

### ACCESSORIES AVAILABLE

| index    | Name  |
|----------|---|
| 81000945 | ELEGANTE LED SYSTEM - OPAL diffuser - 1 rm (max 25 rm)              |
| 388736   | ELEGANTE SYSTEM LED end set   |
| 388743   | ELEGANTE SYSTEM LED gniazdo 3 polowe                                |
| 388750   | ELEGANTE SYSTEM LED gniazdo 5 polowe                                |
| 388767   | ELEGANTE SYSTEM LED wtyk 3 polowy                                   |
| 388774   | ELEGANTE SYSTEM LED wtyk 5 polowy                                   |
| 388729   | ELEGANTE SYSTEM LED klosz PC opal co-extrusion+soft fixing part 25m |



ELEGANTE SYSTEM LED gniazdo 3 polowe (388743)



ELEGANTE SYSTEM LED gniazdo 5 polowe (388750)



ELEGANTE SYSTEM LED wtyk 3 polowy (388767)



ELEGANTE SYSTEM LED wtyk 5 polowy (388774)



ELEGANTE SYSTEM LED klosz PC opal co-extrusion+soft fixing part 25m (388729)

Card creation date: 03 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 244/2023