


TERRA 2 LED LONG N X2 1195X140MM 2550LM 840 WHITE-BLACK MAT (31W)

DETAILED CARD

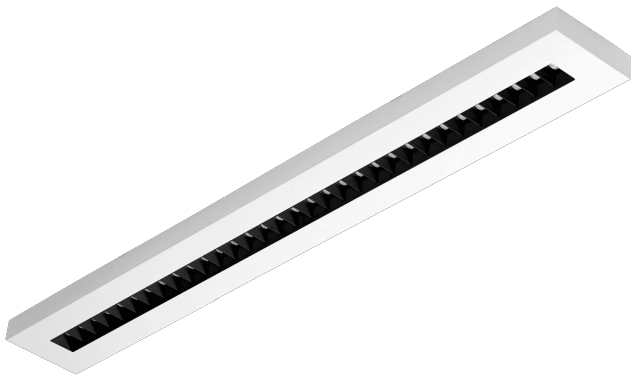

TECHNICAL PARAMETERS

Index:	227028
Ingress protection:	IP20
Nominal power [W]:	31
Luminous flux [lm]*:	2550
Color rendering index (Ra) >:	80
SDCM:	3
Material of the body:	powder coated steel
Mounting version:	surface
Dimensions (H/W/T/S) [mm]:	1195/140/36
Warranty [years]:	5

CHARACTERISTICS

LED luminaire with high total luminous Flux. Made of powder coated white steel sheet. The luminaire has a patented HE reflector installed, which ensures efficiency and effectively eliminates glare. Available mounting versions: surface, recessed in modular and suspended. The surface-mounted version uses solutions that enhance the speed and safety of installation. A multitude of versions & dimentions allow to replace worn-out recessed fluorescent luminaires.

APPLICATION

General purpose surface mounted luminaire for indoor application in offices or other utility rooms. Appropriate as the main light source even when the work requires eyesight concentration.

TERRA 2 LED LONG N X2 1195X140MM 2550LM 840 WHITE-BLACK MAT (31W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	227028	Ingress protection:	IP20
Light source:	LED module	Mounting version:	surface
Nominal power [W]:	31	Working temperature [°C]:	from -20 to +35
Rated power of the luminaire [W]:	34	Category type:	troffers
Supply voltage [V]:	220 - 240	Category of application:	educational institutions, commercial facilities
Luminous flux [lm]:	2550	Version:	2x1
Luminous efficacy [lm/W]:	75	AC voltage range [V]:	220 - 240
Energy efficiency class:	F	UGR (4H8H):	< 16.7
Electrical protection class:	II	LED lifespan L70B50 [h]:	132000
Colour temperature [K]:	4000	LED lifespan L80B20 [h]:	84000
Color rendering index (Ra) >:	80	LED lifespan L90B10 [h]:	42000
SDCM:	3	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Power factor:	0.95	Warranty [years]:	5
Optics:	black HE	CE certificate:	354/2023
Material of the body:	powder coated steel	Manual:	Download PDF
Colour of the body:	white mat	Plik LDT:	Download
Dimensions (H/W/T/S) [mm]:	1195/140/36		

Card creation date: 28 October 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 354/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl