

# SOLANTO MULTI Z 600MM+900MM 1650-2800LM 840 IP20 I CL. OPAL BLACK 26-44W

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Rated power [W] - range:</b>	26 – 44
<b>Luminous flux of the luminaire [lm] - range:</b>	1650-2800
<b>Colour temperature [K]:</b>	4000
<b>Energy efficiency class:</b>	F
<b>Diffuser material:</b>	PS
<b>Diffuser type:</b>	OPAL
<b>Diffuser colour:</b>	milky
<b>Material of the body:</b>	Steel
<b>Colour of the body:</b>	black
<b>Dimensions (H/W/T/S) [mm]:</b>	Ø 900/32,Ø 602/32

## CHARACTERISTICS

Suspended LED luminaire composed of two rings (602 and 900mm), allowing for attractive arrangement of representative interiors. The luminaire is made of powder-coated steel in white, black, or any other color which matches the character of the interior. The diffusers made with thermoforming method emphasize the decorative character of the luminaire. The pendant option includes a complete pendant system with a central box.

Multi LED version allows to choose from 4 lumens and power settings increasing its versatility and functionality and at the same time reducing the number of indexes to the minimum.

## APPLICATION

SOLANTO DUO is a very impressive pendant luminaire dedicated to such interiors as lobbies, receptions, shopping malls, showrooms. It can also be used in flats or apartments and perfectly fits into stylish surroundings.


# SOLANTO MULTI Z 600MM+900MM 1650-2800LM 840 IP20 I CL. OPAL BLACK 26-44W

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	463723	Diffuser material:	PS
EAN:	5905963463723	Diffuser type:	OPAL
Light source:	LED module	Diffuser colour:	milky
Rated power [W] - range:	26 – 44	Material of the body:	Steel
Luminous flux of the luminaire [lm] - range:	1650-2800	Dimensions (H/W/T/S) [mm]:	Ø 900/32,Ø 602/32
Colour temperature [K]:	4000	Ingress protection:	IP20
Colour of the body:	black	Mounting version:	suspended
Energy efficiency class:	F	Cable length [m]:	1.20
Supply voltage [V]:	220 - 240	Number on the palette [pcs]:	1
Frequency [Hz]:	50 - 60	Net weight [kg]:	6.500
Luminous efficacy [lm/W]:	63	Warranty [years]:	5
Electrical protection class:	I	CE certificate:	<a href="#">219/2023</a>
Colour rendering index:	>80	Warranty [years]:	5
SDCM:	≤ 3	Manual:	<a href="#">Download PDF</a>
LED lifespan L70B50 [h]:	116600	Category type:	architectural
LED lifespan L80B20 [h]:	73 600	Category of application:	HoReCa, art and culture
LED lifespan L90B10 [h]:	35700	Plik LDT:	<a href="#">Download</a>

## LIGHT CURVES

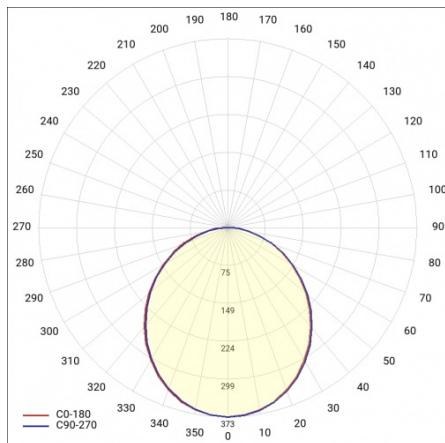

Card creation date: 02 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 219/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl