
SOLANTO MULTI Z 600MM+900MM 2080-3520LM 840 IP20 I CL. OPAL WHITE 26-44W

DETAILED CARD

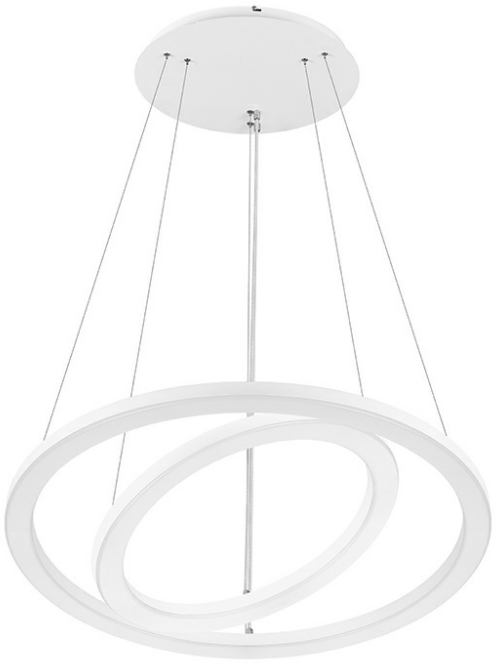

TECHNICAL PARAMETERS

Rated power [W] - range:	26 – 44
Luminous flux of the luminaire [lm] - range:	2080-3520
Colour temperature [K]:	4000
Energy efficiency class:	D
Diffuser material:	PS
Diffuser type:	OPAL
Diffuser colour:	milky
Material of the body:	Steel
Colour of the body:	white
Dimensions (H/W/T/S) [mm]:	Ø 900/32,Ø 602/32

CHARACTERISTICS

Suspended LED luminaire composed of two rings (602 and 900mm), allowing for attractive arrangement of representative interiors. The luminaire is made of powder-coated steel in white, black, or any other color which matches the character of the interior. The diffusers made with thermoforming method emphasize the decorative character of the luminaire. The pendant option includes a complete pendant system with a central box.
Multi LED version allows to choose from 4 lumens and power settings increasing its versatility and functionality and at the same time reducing the number of indexes to the minimum.

APPLICATION

SOLANTO DUO is a very impressive pendant luminaire dedicated to such interiors as lobbies, receptions, shopping malls, showrooms. It can also be used in flats or apartments and perfectly fits into stylish surroundings.

SOLANTO MULTI Z 600MM+900MM 2080-3520LM 840 IP20 I CL. OPAL WHITE 26-44W

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	463563
EAN:	5905963463563
Category type:	decorative fixtures
Category of application:	HoReCa
Light source:	LED module
Rated power [W] - range:	26 – 44
Luminous flux of the luminaire [lm] - range:	2080-3520
Colour temperature [K]:	4000
Supply voltage [V]:	220 - 240
Frequency [Hz]:	50 - 60
Luminous efficacy [lm/W]:	80
Energy efficiency class:	D
Electrical protection class:	I
Color rendering index (Ra) >:	80
SDCM:	3
LED lifespan L70B50 [h]:	116600
LED lifespan L80B10 [h]:	73 600
LED lifespan L90B10 [h]:	35700

Working temperature [°C]:	from 0 to +35
Diffuser material:	PS
Diffuser type:	OPAL
Diffuser colour:	milky
Material of the body:	Steel
Colour of the body:	white
Dimensions (H/W/T/S) [mm]:	Ø 900/32,Ø 602/32
Ingress protection:	IP20
Mounting version:	suspended
Cable length [m]:	1.20
Number on the palette [pcs]:	1
Net weight [kg]:	6.500
Warranty [years]:	5
CE certificate:	219/2023
Manual:	Download PDF
ISO Certificates:	9001:2015, 14001:2015, 45001:2018, 50001:2018
Plik LDT:	Download

Card creation date: 24 July 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 219/2023

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl