

# SOLANTO Z 600MM+900MM 2200LM 830 IP20 I CL. DALI OPAL BLACK 38W

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Rated power [W] - range:</b>	38
<b>Luminous flux of the luminaire [lm] - range:</b>	3300
<b>Colour temperature [K]:</b>	3000
<b>Energy efficiency class:</b>	F
<b>Diffuser material:</b>	PS
<b>Diffuser type:</b>	OPAL
<b>Diffuser colour:</b>	milky
<b>Material of the body:</b>	Steel
<b>Colour of the body:</b>	black
<b>Dimensions (H/W/T/S) [mm]:</b>	900/32

## CHARACTERISTICS

Suspended LED luminaire composed of two rings (602 and 900mm), allowing for attractive arrangement of representative interiors. The luminaire is made of powder-coated steel in white, black, or any other color which matches the character of the interior. The diffusers made with thermoforming method emphasize the decorative character of the luminaire. The pendant option includes a complete pendant system with a central box.

Multi LED version allows to choose from 4 lumens and power settings increasing its versatility and functionality and at the same time reducing the number of indexes to the minimum.

## APPLICATION

SOLANTO DUO is a very impressive pendant luminaire dedicated to such interiors as lobbies, receptions, shopping malls, showrooms. It can also be used in flats or apartments and perfectly fits into stylish surroundings.


# SOLANTO Z 600MM+900MM 2200LM 830 IP20 I CL. DALI OPAL BLACK 38W

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

<b>Index:</b>	463778	<b>Diffuser material:</b>	PS
<b>EAN:</b>	5905963463778	<b>Diffuser type:</b>	OPAL
<b>Light source:</b>	LED module	<b>Diffuser colour:</b>	milky
<b>Rated power [W] - range:</b>	38	<b>Material of the body:</b>	Steel
<b>Luminous flux of the luminaire [lm] - range:</b>	3300	<b>Dimensions (H/W/T/S) [mm]:</b>	900/32
<b>Colour temperature [K]:</b>	3000	<b>Ingress protection:</b>	IP20
<b>Colour of the body:</b>	black	<b>Mounting version:</b>	suspended
<b>DIMM DALI:</b>	yes	<b>Cable length [m]:</b>	1.20
<b>Energy efficiency class:</b>	F	<b>Number on the palette [pcs]:</b>	1
<b>Supply voltage [V]:</b>	220 - 240	<b>Net weight [kg]:</b>	6.700
<b>Frequency [Hz]:</b>	50 - 60	<b>Warranty [years]:</b>	5
<b>Luminous efficacy [lm/W]:</b>	57	<b>CE certificate:</b>	<a href="#">219/2023</a>
<b>Electrical protection class:</b>	I	<b>Warranty [years]:</b>	5
<b>Colour rendering index:</b>	>80	<b>Manual:</b>	<a href="#">Download PDF</a>
<b>SDCM:</b>	≤ 3	<b>Category type:</b>	architectural
<b>LED lifespan L70B50 [h]:</b>	116600	<b>Category of application:</b>	HoReCa, art and culture
<b>LED lifespan L80B20 [h]:</b>	73 600	<b>Nominal power [W]:</b>	35
<b>LED lifespan L90B10 [h]:</b>	35700	<b>Plik LDT:</b>	<a href="#">Download</a>

## LIGHT CURVES

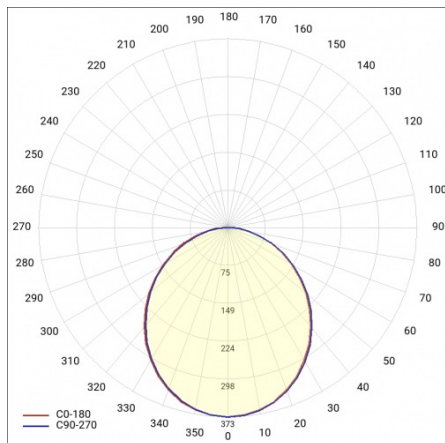

Card creation date: 02 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 219/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl