


# UV-C STERILON FLOW 144W

## DETAILED CARD

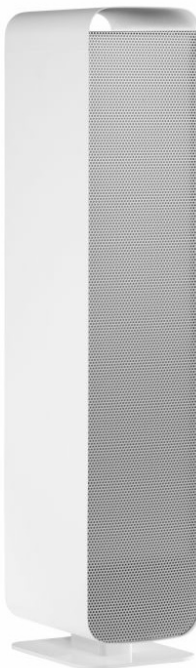

### TECHNICAL PARAMETERS

Nominal power [W]:	144
Supply voltage [V]:	220 - 240
Electrical protection class:	I
Material of the body:	carbon steel
Dimensions (H/W/T/S) [mm]:	724/160/220
Ingress protection:	IP20
Mounting version:	detached
Flow air disinfection function:	yes
Max volume of the disinfected room [m3]:	120
Direct surface disinfection function:	yes

### CHARACTERISTICS

UV-C STERILON FLOW 144W luminaires emitting ultraviolet (UV-C) light are one of the most effective devices capable of removing viruses, bacteria, fungi from the surface or destroying the DNA or RNA of any exposed microorganisms. It is available as dual-function products.

### APPLICATION

Luminaires are recommended for use in service-providing facilities (hair and beauty salons), health care facilities, hotels, restaurants, public administration, educational and care facilities.

# UV-C STERILON FLOW 144W

## DETAILED CARD

### TECHNICAL PARAMETERS TABLE

Index:	240423	Type of light:	ultraviolet UV-C
Light source:	UV-C	Protection against opening:	yes
Nominal power [W]:	144	Noise intensity [dB]:	44
Service life of the UV-C radiation source [h]:	9000	Internal element emitting UV-C radiation [W]:	4x36
Supply voltage [V]:	220 - 240	EAN:	5905963240423
Electrical protection class:	I	Frequency [Hz]:	50 - 60
Exchangeable source:	yes	Luminous efficacy [lm/W]:	4.80
Material of the body:	carbon steel	Light colour:	violet
Colour of the body:	white/silver	LED lifespan L70B50 [h]:	9000
Dimensions (H/W/T/S) [mm]:	724/160/220	Working temperature [°C]:	from -20 to +45
Ingress protection:	IP20	Operating mode:	no
Mounting version:	detached	Control:	yes
Plug type:	UNI-SCHUKO	Master/slave:	no
Version:	dual-purpose	Through wiring:	no
Cable length [m]:	3	Protection type:	yes
Switch:	yes	Number in carton box [pcs]:	1
Net weight [kg]:	10.290	Number on the palette [pcs]:	20
Gross weight [kg]:	10.980	Direct surface disinfection function:	yes
Total power consumption [W]:	155	Illumination area at a distance of 1 m:	14
UV-C wavelength [nm]:	253.70	Warranty [years]:	2
Dust filter:	yes	CE certificate:	<a href="#">324/2023</a>
Flow air disinfection function:	yes	PZH certificate:	<a href="#">B-BK-60212-0317/20</a>
Max volume of the disinfected room [m3]:	120	Manual:	<a href="#">Download PDF</a>
HEPA filter holder:	yes		
Air flow [m3 / h]:	200		

# UV-C STERILON FLOW 144W


DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
WL36500	PL-L UV-C 36W 2G11 OSR fluorescent lamp
240492	Wall bracket STERILON FLOW 144W
243660	Set of guide wheels Sterilon Flow 144W white matt
243677	HEPA H10 filter - set of 5 only for the Flow model
WSAW347	WSAW347 - SterilOn fan dust filter 115x115 PPM 30 1pkg=3pcs
243639	UV-C protective glasses



Set of guide wheels Sterilon Flow 144W white matt (243660)



HEPA H10 filter - set of 5 only for the Flow model (243677)



UV-C protective glasses (243639)

Card creation date: 22 July 2021  
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 324/2023