

UV-C STERILON SQUARE P 595X595MM X2 3500LM 840 WHITE GLOSSY (UV-C-72W/LED-31W)

DETAILED CARD



TECHNICAL PARAMETERS

Nominal power [W]:	103
Supply voltage [V]:	220 - 240
Electrical protection class:	I
Material of the body:	Steel
Dimensions (H/W/T/S) [mm]:	595/595/47
Ingress protection:	IP20
Mounting version:	recessed
Direct surface disinfection function:	yes

CHARACTERISTICS

STERILON SQUARE UV-C luminaires combine the functions of lighting and surface disinfection. Luminaires emitting ultraviolet (UV-C) light are one of the most effective devices capable of removing viruses, bacteria, mold from the surface or destroying the DNA or RNA of any exposed microorganisms.

APPLICATION

Luminaires are recommended for use in service-providing facilities (hair and beauty salons), health care facilities, hotels, restaurants, public administration, educational and care facilities, as well as other spaces requiring general lighting and periodic disinfection.


UV-C STERILON SQUARE P 595X595MM X2 3500LM 840 WHITE GLOSSY (UV-C-72W/LED-31W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	240232	Internal element emitting UV-C radiation [W]:	2x36
Category type:	bactericidal and virucidal lamps	Net weight [kg]:	2.960
Product line:	UV-C STERILON	Luminous flux [lm]:	3500
Light source:	UV-C	EAN:	5905963240232
Nominal power [W]:	103	Source luminous flux [lm]*:	3500
Service life of the UV-C radiation source [h]:	9000	Frequency [Hz]:	50 - 60
Supply voltage [V]:	220 - 240	Luminous efficacy [lm/W]:	2.40
Electrical protection class:	I	Light colour:	white / violet
Colour temperature [K]:	4000	LED lifespan L70B50 [h]:	9000
Exchangeable source:	yes	Working temperature [°C]:	from -20 to +45
Colour of the body:	white mat	Operating mode:	no
Material of the body:	Steel	Control:	no
Dimensions (H/W/T/S) [mm]:	595/595/47	Master/slave:	no
Mounting version:	recessed	Through wiring:	no
Ingress protection:	IP20	Protection type:	mo
Version:	inverted RCR motion sensor	Number in carton box [pcs]:	1
Motion sensor:	yes	Gross weight [kg]:	3.450
Total power consumption [W]:	31	Warranty [years]:	2
UV-C wavelength [nm]:	253.70	CE certificate:	440/2023
Direct surface disinfection function:	yes	PZH certificate:	B-BK-60212-0438/20
Illumination area at a distance of 1 m:	20	Manual:	Download PDF
Type of light:	LED/UV-C	Plik LDT:	Download
Type of direct surface disinfection:	one-way		

LIGHT CURVES

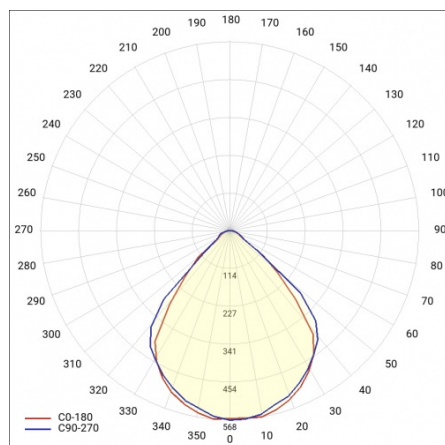

UV-C STERILON SQUARE P 595X595MM X2 3500LM 840 WHITE GLOSSY (UV-C-72W/LED-31W)

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
WL36500	PL-L UV-C 36W 2G11 OSR fluorescent lamp
243639	UV-C protective glasses



UV-C protective glasses (243639)

Card creation date: 03 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 440/2023