


# SMART LED EVO BRACKET

GENERAL CARD

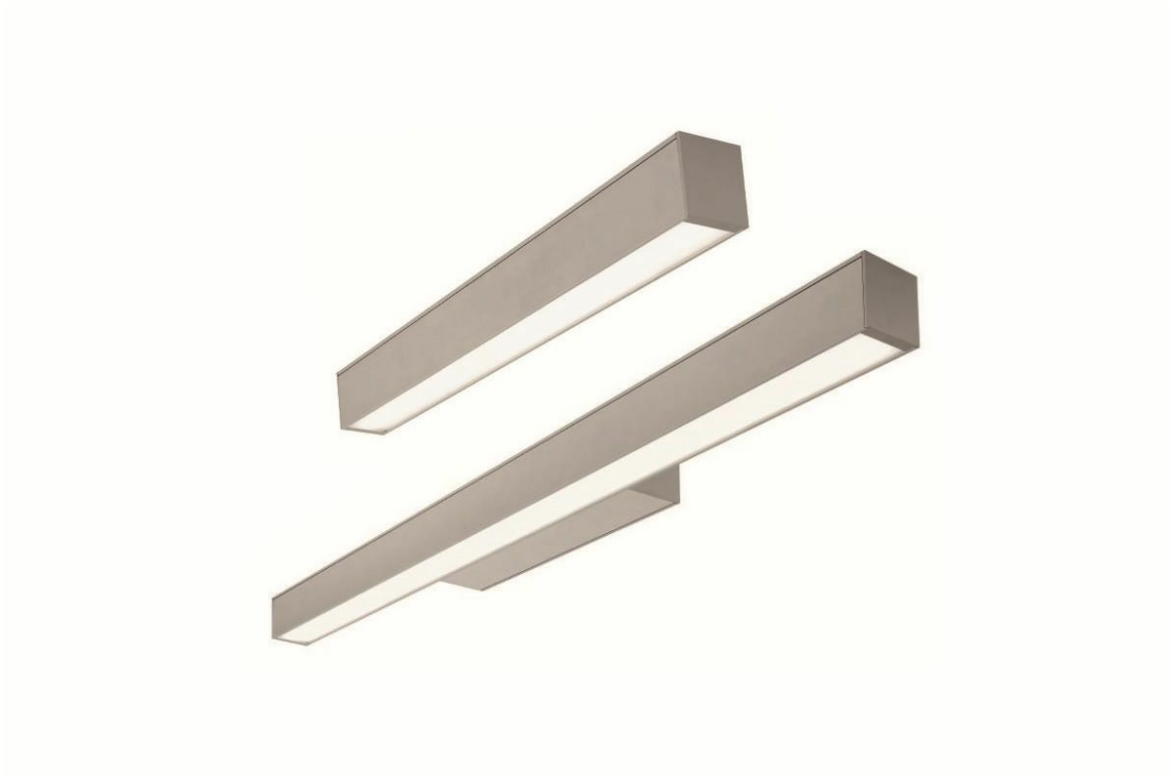

## TECHNICAL PARAMETERS

Luminous flux [lm]*:	850 - 4900
Colour of the body:	anoda C0

## CHARACTERISTICS

Robust frame made of aluminum profile with a very narrow cross profile. The special features of the Smart Led Evo Bracket line include discreet elegance and energy efficiency. The optical system involves an iridescent screen that provides soft light.

The luminaire is available in:

- 3 lengths and 4 powers,
- 2 structural variants: with an additional spacer profile (variant B) or without it (variant A)
- 2 lighting versions: one-sided (DIR) or double-sided (DIR/IND).

## APPLICATION

Unique design predisposes these luminaires for the following environments: offices, conference rooms and other representative spaces.

# SMART LED EVO BRACKET

GENERAL CARD

## AVAILABLE VERSIONS



Click index >>, to see details

Card creation date:19 June 2023

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric andelectronic waste equipment regulations (WEEE).



Certificate CE - Nr: 52/2018; 53/2018



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl