


MADERA II LED

GENERAL CARD

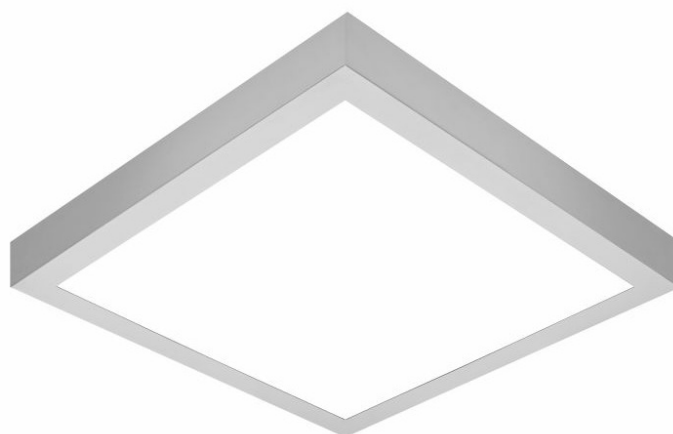

TECHNICAL PARAMETERS

Ingress protection:	IP44
Impact resistance:	IK07
Nominal power [W]:	18.00; 24.00; 30.00; 36.00; 48.00
Luminous flux [lm]*:	1250 - 4800
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	E; F; G
Material of the body:	powder coated steel
Diffuser material:	PMMA
Diffuser type:	OPAL; PRM
Mounting version:	surface; surface, suspended
Dimensions (H/W/T/S) [mm]:	310/310/65; 620/350/65; 480/480/65; 620/620/65; 1170/350/65;

CHARACTERISTICS

Surface mounted, square LED fitting with high luminous flux, made of steel sheet, powder-coated grey; equipped with energy-saving light source LED-GO!. Opal or PRM PMMA diffuser ensures even light distribution and no glare effect. Decorative fitting available in two diffuser sizes; optional equipment: radio motion sensor (RCR).

APPLICATION

Surface-mounted luminaire intended for indoor use in offices or common rooms. Suitable as a general light source in representative rooms. Available option with a radio motion sensor (RCR) – particularly well suited for passageways and usable rooms. Product designed for surface mounting either on ceilings or on walls.

MADERA II LED

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

MADERA II LED 1170/350/65mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	Emergency lighting [h]	Colour of the body	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473081
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 471131
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 471162
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 471155
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473258

MADERA II LED 310/310/65mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	Emergency lighting [h]	Colour of the body	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473319/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473517/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473326/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473913/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473722/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 472299/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 472268/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473920
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473999/PA

MADERA II LED

GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	Emergency lighting [h]	Colour of the body	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 481000/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 472350/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 472329/PA

MADERA II LED 480/480/65mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	Emergency lighting [h]	Colour of the body	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473333/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473531/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473340/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473944/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 472305/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 472275/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473548/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473623/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 483028/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 472367/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 472336/PA

MADERA II LED 620/350/65mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	Emergency lighting [h]	Colour of the body	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
-------------------	------------------------	---------------------	---------------	---------------	-------------------	------------------------	--------------------	---------------------------	-------------------------	-------

MADERA II LED

GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	Emergency lighting [h]	Colour of the body	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473166
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 471230
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 471056
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 471087
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 471070
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 471094
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 471124

MADERA II LED 620/620/65mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	Emergency lighting [h]	Colour of the body	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473555/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473562/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473968/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 472404/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 472411/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 620447
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 486050/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473371/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473388/PA

MADERA II LED


GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	Emergency lighting [h]	Colour of the body	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 473982/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 494185/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 472312/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 472282/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 472374/PA
0	3000; 4000	1250 - 6500	OPAL; PRM	yes	yes	3	biały; czarny; szary	1170/350/65; 310/310/65; 480/480/65; 600/200/65; 620/200/68; 620/350/65; 620/620/65; stal malowana proszkowo	A; A+	>> 472343/PA

MADERA II LED

GENERAL CARD

LUMINOUS INTENSITY DISTRIB. CURVE



MADERA-LED

MADERA II LED

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
392399	MADERA II LED Z Suspension 110mm x 110mm WHITE
392405	MADERA II LED Z suspension 110mm x 110 mm BLACK
392450	MADERA II LED Z suspension 196mm x 196mm WHITE
392467	MADERA II LED Z suspension 196mm x 196mm BLACK
299544	MADERA II LED Z suspension 400mm x 53mm WHITE
299551	MADERA II LED Z suspension 400mm x 53mm BLACK

Card creation date: 03 December 2020
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 24/2018; 26/2014



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl