


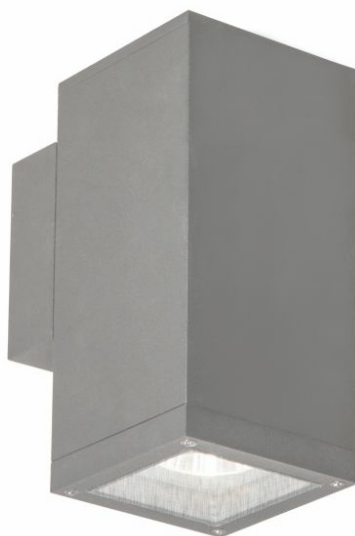

TECHNICAL PARAMETERS

Ingress protection:	IP65
Impact resistance:	IK06
Rated power of the luminaire [W]*:	18.00; 24.00
Luminous flux [lm]*:	1540 - 1865
Colour temperature [K]:	3000; 4000; 5700
Energy efficiency class:	F
Material of the body:	aluminium
Diffuser material:	tempered glass
Diffuser type:	transparent
Optics material:	PC
Optics:	Reflektor
Dimensions (H/W/T/S) [mm]:	204/136; 250/136;
Warranty [years]:	2

CHARACTERISTICS

This energy-saving, outdoor accent LED fitting ensures economical and long-term operation without the need to replace light sources. It has high ingress protection rating of IP65—from dust ingress and water jets from any direction. The ingress protection is ensured by its design—aluminium body and tempered glass additionally protected with a seal. The fitting is available in many light distribution options and two lighting versions:

- up or down
- up and down

APPLICATION

The fitting for wall mounting (directly to the surface by means of wall plugs) is designed especially for accent outdoor lighting of facades of: hotels, offices, apartment buildings but also private houses, passageways and entrance areas.

QUBE LED

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

QUBE LED up and down

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Beam angle [°]	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
24	3000	1775	12	250/136	F	>> 959837
24	4000	1800	12	250/136	F	>> 959844
24	5700	1865	12	250/136	F	>> 959851
24	3000	1740	18	250/136	F	>> 959868
24	4000	1790	18	250/136	F	>> 959875
24	5700	1805	18	250/136	F	>> 959882
24	3000	1735	32	250/136	F	>> 959899
24	4000	1750	32	250/136	F	>> 959905
24	5700	1775	32	250/136	F	>> 959912

QUBE LED up or down

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Beam angle [°]	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
18	3000	1560	12	204/136	F	>> 959479
18	4000	1655	12	204/136	F	>> 959486
18	5700	1665	12	204/136	F	>> 959493
18	3000	1560	18	204/136	F	>> 959509
18	4000	1660	18	204/136	F	>> 959516
18	5700	1635	18	204/136	F	>> 959523
18	3000	1540	32	204/136	F	>> 959530
18	4000	1605	32	204/136	F	>> 959547
18	5700	1615	32	204/136	F	>> 959554

Card creation date: 12 January 2021

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 89/2019



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl