


# NECTRA LITE LED

GENERAL CARD

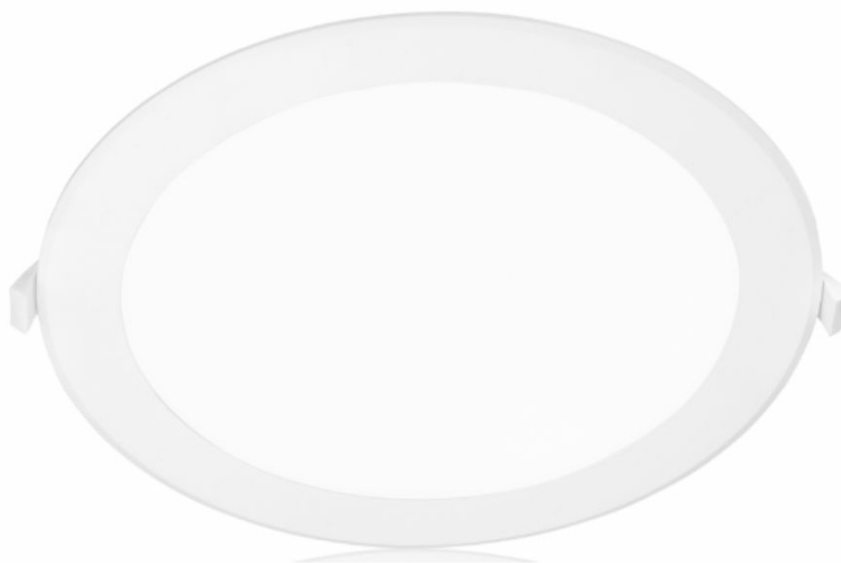

## TECHNICAL PARAMETERS

<b>Ingress protection:</b>	IP20; IP44/20
<b>Nominal power [W]:</b>	14.00 - 25.00
<b>Luminous flux [lm]*:</b>	1330 - 2450
<b>Colour temperature [K]:</b>	4000
<b>Colour rendering index:</b>	>80
<b>Electrical protection class:</b>	II
<b>Energy efficiency class:</b>	E
<b>Material of the body:</b>	PC; PC , steel
<b>Colour of the body:</b>	white
<b>Diffuser type:</b>	OPAL
<b>Dimensions (H/W/T/S) [mm]:</b>	145/66; 174/69; 224/84; 88/228/228;
<b>Mounting version:</b>	recessed; surface

## CHARACTERISTICS

Downlight type fitting with an integrated energy-saving LED source. Made of lightweight aluminium and plastic. Available in two ringcolours and three power versions. Its distinctive features are low profile, light weight and very easy and fast installation.

## APPLICATION

Designed for indoor use in common areas, passageways or to provide additional illumination in the office rooms. Due to equal surface illumination and high energy savings, it is especially recommended for public buildings.

# NECTRA LITE LED

GENERAL CARD

## AVAILABLE VERSIONS



Click index >>, to see details

### NECTRA LITE LED surface

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Ingress protection	Energy efficiency class	Index
20	4000	2000	OPAL	88/228/228	IP20	E	<a href="#">&gt;&gt; 502644</a>
25	4000	2450	OPAL	88/228/228	IP20	E	<a href="#">&gt;&gt; 502651</a>


### NECTRA LITE LED recessed

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Ingress protection	Energy efficiency class	Index
14	4000	1330	OPAL	145/66	IP44/20	E	<a href="#">&gt;&gt; 502606</a>
17	4000	1650	OPAL	174/69	IP44/20	E	<a href="#">&gt;&gt; 502613</a>
20	4000	2000	OPAL	224/84	IP44/20	E	<a href="#">&gt;&gt; 502620</a>
25	4000	2450	OPAL	224/84	IP44/20	E	<a href="#">&gt;&gt; 502637</a>


# NECTRA LITE LED

## GENERAL CARD


### LUMINOUS INTENSITY DISTRIB. CURVE




NECTRA LITE LED 14W



NECTRA LITE LED 17W



NECTRA LITE LED 20W



NECTRA LITE LED 25W

Card creation date: 09 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 344/2023; 346/2023; 79/2020; 82/2020



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl