

# DOT CS 2W 2H M

## EMERGENCY LIGHTING




220-240 V | 50-60 Hz | LED |  IP65 | 

### TECHNICAL PARAMETERS

Index:	550119
Ingress protection:	IP65
Luminous flux [lm]*:	250
Colour temperature [K]:	5000
Material of the body:	PC
Emergency lighting [h]:	2
Battery:	NiMh
Mounting version:	surface
CNBOP certificate:	3216/2018

\*Tolerance +/- 10%

### LIGHT CURVES

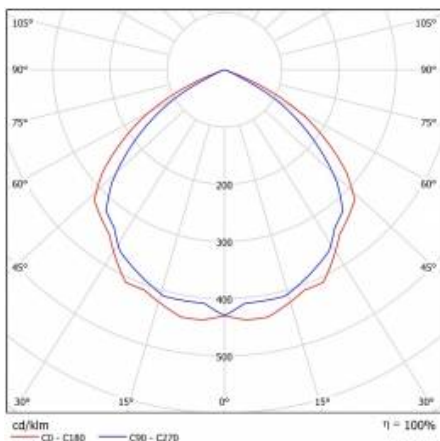

### CHARACTERISTICS

Surface mounted autonomous emergency luminaire with integrated, energy-saving LED GO! light panel. Body made of polycarbonate (PC). Optical system available in 3 variants: basic, corridor, open space. Luminaire is fitted with batteries with 1h, 2h or 3h emergency operation time. The luminaire is using Ni-Mh or Ni-Cd battery with voltage of 3.6V and 24 hours of full charge with manual or automatic test function (AT).

Available versions:

- M – maintained,
- NM- non-maintained,
- AT – autotest.

### APPLICATION

Autonomous emergency luminaire is mainly used for illumination of escape routes and fire protection devices after power failure, i.e. in emergency mode. Especially recommended everywhere, where it is necessary to install emergency lighting within the scope of modernization of existing system. Successfully replaces luminaires with embedded emergency module. Due to additional sealing, the luminaire achieves IP65 tightness and may be used in places with increased humidity or outdoors under the roofing.

# DOT CS 2W 2H M

## EMERGENCY LIGHTING

### TECHNICAL PARAMETERS TABLE

Light source:	LED module	Ingress protection:	IP65
Nominal power [W]:	2	Mounting version:	surface
Rated power of the luminaire [W]:	2	Working temperature [°C]:	from +5 to +35
Supply voltage [V]:	220-240	Emergency lighting [h]:	2
Frequency [Hz]:	50 - 60	Net weight of the luminaire [kg]:	0.250
Luminous flux [lm]:	250	CE certificate:	<a href="#">96/2019</a>
Luminous efficacy [lm/W]:	125	Index:	550119
Electrical protection class:	II	EAN:	5905963550119
Colour temperature [K]:	5000	Category type:	emergency lighting
Colour rendering index:	>70	Version:	general
LED lifespan L70B50 [h]:	275000	CNBOP certificate:	3216/2018
Beam angle [°]:	120	Light distribution type:	general
Battery:	NiMh	ETIM class:	EC001957
Diffuser material:	PMMA	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Material of the body:	PC	Luminaire rated power $P_{min}$ [W]:	2
Colour of the body:	white	Warranty [years]:	2 / 0.5 (battery)
Dimensions [mm]:	∅140/40	Manual:	<a href="#">Download PDF</a>
Mounting dimensions [mm]:	104		

\*Tolerance+/- 10%

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2021-03-08



Lena Lighting S.A.  
ul. Kórnicka 52  
63-000 Środa Wielkopolska

tel. +48 61 28 60 300  
e-mail: [office@lenalighting.pl](mailto:office@lenalighting.pl)  
[www.lenalighting.pl](http://www.lenalighting.pl)



The luminaire complies with the EU ROHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



96/2019