

# MIMO LED 1230MM 3350LM IP66 840 (23W)

BATTENS

LED




LED |  IP66 |  IK06

## TECHNICAL PARAMETERS

Index:	100963
Ingress protection:	IP66
Impact resistance:	IK06
Nominal power [W]:	23
Luminous flux [lm]*:	3350
Colour temperature [K]:	4000
Colour rendering index:	>80
SDCM:	≤ 3
Electrical protection class:	II
Energy efficiency class:	A+

\*Tolerance +/- 10%

## LIGHT CURVES

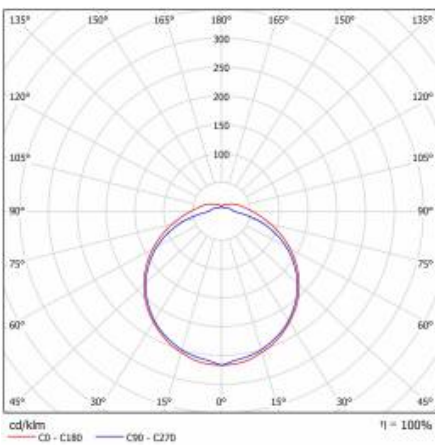

## CHARACTERISTICS

MIMO LED represents the new generation of hermetic LED luminaires with very high IP66 tightness. The luminaire uses modern concepts to improve light distribution and temperature balance. Its design involved both proven solutions that affect high efficiency and durability, as well as efficient LED modules offering the best lighting level required and energy savings of up to 66%. The multilayer shade has been made of UV-resistant polycarbonate.

## APPLICATION

The multifunctional LED luminaire is designed for use in areas with increased dust and humidity. It is particularly suitable for industrial conditions, car parks (underground and multi-storey ones), sports stadiums, warehouses, transport terminals and underground passages. The luminaire is used both in new applications, as well as in replacing traditional fluorescent luminaires with energy-saving LED solutions. Its design is adapted for surface and suspended installation using standard equipment.

# MIMO LED 1230MM 3350LM IP66 840 (23W)

BATTENS

LED

## TECHNICAL PARAMETERS TABLE

Index:	100963	Diffuser type:	OPAL
EAN:	5905963100963	Material of the body:	PC
Light source:	LED module	Dimensions [mm]:	1230/55/35
Nominal power [W]:	23	Mounting dimensions [mm]:	1270/57/37
Rated power of the luminaire [W]:	25	Impact resistance:	IK06
Supply voltage [V]:	220-240	Ingress protection:	IP66
Frequency [Hz]:	50 - 60	Mounting version:	surface, suspended
Luminous flux [lm]:	3350	Net weight of the luminaire [kg]:	0.400
Luminous efficacy [lm/W]:	134	Category type:	battens
Energy efficiency class:	A+	LED lifespan L70B50 [h]:	100000
Electrical protection class:	II	CE certificate:	<a href="#">175/2017</a>
Colour temperature [K]:	4000	ETIM class:	EC000109
Colour rendering index:	>80	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
SDCM:	≤ 3	Warranty [years]:	2
Power factor:	0.92	Manual:	<a href="#">Download PDF</a>
Diffuser material:	PC		

\*Tolerance+/- 10%

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2020-05-28



Lena Lighting S.A.  
ul. Kórnicka 52  
63-000 Sroda Wielkopolska

tel. +48 61 28 60 300  
e-mail: [office@lenalighting.pl](mailto:office@lenalighting.pl)  
[www.lenalighting.pl](http://www.lenalighting.pl)



The luminaire complies with the EU ROHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



175/2017