

# MIRRA LED IP44 15W 600MM 4000K

BATTENS

LED



220-240 V | LED |  IP44

## TECHNICAL PARAMETERS

Index:	703164
Ingress protection:	IP44
Nominal power [W]:	15
Luminous flux [lm]*:	1200
Colour temperature [K]:	4000
Colour rendering index:	>80
Electrical protection class:	II
Energy efficiency class:	A
Diffuser type:	OPAL
Mounting version:	surface, wall mounted

\*Tolerance +/- 10%


## CHARACTERISTICS

Versatile LED luminaire intended for indoor use in rooms with increased humidity. It is widely used in office and commercial facilities, in particular, bathrooms and toilets. Body made of PC. White and grey end caps included.

## APPLICATION

The luminaire is suitable for rooms that require increased ingress protection (IP44) such as toilets and bathrooms in public facilities; schools, public offices; shopping malls, office buildings and industrial buildings.

## LIGHT CURVES

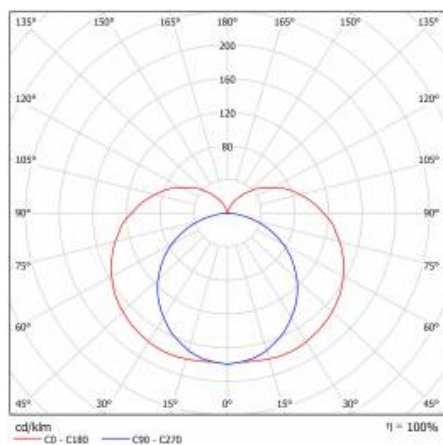

# MIRRA LED IP44 15W 600MM 4000K

BATTENS

LED

## TECHNICAL PARAMETERS TABLE

Light source:	LED module	Dimensions [mm]:	52/69/600
Nominal power [W]:	15	Ingress protection:	IP44
Rated power of the luminaire [W]:	15	Mounting version:	surface, wall mounted
Supply voltage [V]:	220-240	Working temperature [°C]:	from -10 to +35
Frequency [Hz]:	50 - 60	Net weight of the luminaire [kg]:	0.350
Luminous flux [lm]:	1200	CE certificate:	<a href="#">35/2018</a>
Luminous efficacy [lm/W]:	80	Index:	703164
Energy efficiency class:	A	EAN:	5905963703164
Electrical protection class:	II	Category type:	battens
Colour temperature [K]:	4000	Switch:	yes
Colour rendering index:	>80	ETIM class:	EC000109
Power factor:	0.50	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Diffuser material:	PC	Warranty [years]:	2
Diffuser type:	OPAL	LED lifespan L70B50 [h]:	50000
Diffuser colour:	white	LED lifespan L80B20 [h]:	32000
Optics material:	PC	LED lifespan L90B10 [h]:	15000
Material of the body:	PC	Manual:	<a href="#">Download PDF</a>
Colour of the body:	white		

## TECHNICAL DETAILS



mirra led detal 1



mirra led detal 2

\*Tolerance+/- 10%

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2021-02-10



Lena Lighting S.A.  
ul. Kórnicka 52  
63-000 Środa Wielkopolska

tel. +48 61 28 60 300  
e-mail: [office@lenalighting.pl](mailto:office@lenalighting.pl)  
[www.lenalighting.pl](http://www.lenalighting.pl)



The luminaire complies with the EU ROHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



35/2018