

INTEGRA LED Z MASTER 1X40W PLX 3000K

DETAILED CARD



TECHNICAL PARAMETERS

Index:	523441
Nominal power [W]:	40
Luminous flux [lm]*:	3100
Colour temperature [K]:	3000
Colour rendering index:	>80
Diffuser type:	OPAL
Mounting version:	suspended
Master/slave:	master

CHARACTERISTICS

System of LED decorative, suspended office luminaires made from a high quality materials (silver anodized aluminium profile type C-0) for internal use. INTEGRA CUBE connector system allows designing light lines in a variety of configurations (I, T, X, L). INTEGRA DECO LED version equipped with LED indirect light provides a combination of high light parameters and decorative effects. The system is available in versions with DIMM/DALI and MASTER (IDIM DALI) control systems. It is simple to use and install and user friendly.

APPLICATION

Luminaire dedicated for internal use. For use in office and commercial buildings, and in particular in the representational spaces.


INTEGRA LED Z MASTER 1X40W PLX 3000K

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Nominal power [W]:	40	Beam angle [°]:	120
Light source:	LED module	Diffuser material:	PMMA
Colour temperature [K]:	3000	Material of the body:	aluminium, steel
Luminous flux [lm]:	3100	Colour of the body:	C0 anode
Rated power of the luminaire [W]:	40	Dimensions (H/W/T/S) [mm]:	1440/80/80
Diffuser type:	OPAL	Impact resistance:	IK07
Supply voltage [V]:	220-240	Ingress protection:	IP20
Frequency [Hz]:	50 - 60	Mounting version:	suspended
Master/slave:	master	Working temperature [°C]:	from -25 to +35
Luminous efficacy [lm/W]:	77	Net weight [kg]:	4.200
Energy efficiency class:	F	CE certificate:	60/2014
Electrical protection class:	I	Index:	523441
Colour rendering index:	>80	EAN:	5905963523441
SDCM:	≤ 3	Category type:	systems
LED lifespan L70B50 [h]:	100000	Warranty [years]:	5
		ETIM class:	EC000282
		Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
		Manual:	Download PDF

LIGHT CURVES

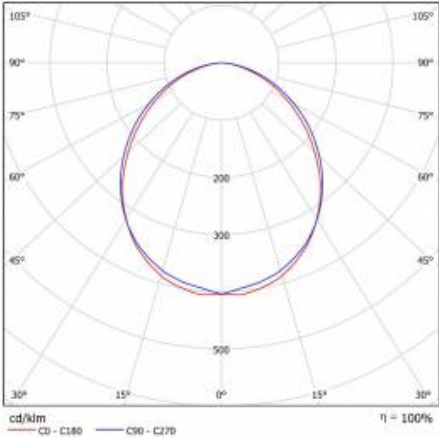


INTEGRA LED Z MASTER 1X40W PLX 3000K

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
531583	
531552	
531569	
531514	
531507	
171512	SINGLE SUSPENDED CORD
171505	SINGLE ELECTRICAL SUSPENDED CORD (ROUND BOX)
171635	SINGLE SUSPENDED CORD (ROUND BOX)
171574	SINGLE ELECTRICAL SUSPENDED CORD (SQUARE BOX)
171642	SINGLE SUSPENDED CORD (SQUARE BOX)



SINGLE SUSPENDED CORD (171512)



SINGLE ELECTRICAL SUSPENDED CORD (ROUND BOX) (171505)



SINGLE SUSPENDED CORD (ROUND BOX) (171635)



SINGLE ELECTRICAL SUSPENDED CORD (SQUARE BOX) (171574)



SINGLE SUSPENDED CORD (SQUARE BOX) (171642)

Card creation date: 12 August 2021
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 60/2014