

INTEGRA LED 2X24W PRM 3000K DECO LED

DETAILED CARD



TECHNICAL PARAMETERS

Index:	524226
Nominal power [W]:	48
Luminous flux [lm]*:	3900
Colour temperature [K]:	3000
Colour rendering index:	>80
Diffuser type:	PRM
Mounting version:	suspended
Version:	Deco LED

CHARACTERISTICS

System of LED decorative, suspended office luminaires made from a high quality materials (silver anodized aluminium profile type C-0) for internal use. INTEGRA CUBE connector system allows designing light lines in a variety of configurations (I, T, X, L). INTEGRA DECO LED version equipped with LED indirect light provides a combination of high light parameters and decorative effects. The system is available in versions with DIMM/DALI and MASTER (IDIM DALI) control systems. It is simple to use and install and user friendly.

APPLICATION

Luminaire dedicated for internal use. For use in office and commercial buildings, and in particular in the representational spaces.


INTEGRA LED 2X24W PRM 3000K DECO LED

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED module	Colour of the body:	C0 anode
Nominal power [W]:	48	Dimensions (H/W/T/S) [mm]:	900/80/155
Rated power of the luminaire [W]:	48	Impact resistance:	IK07
Supply voltage [V]:	220-240	Ingress protection:	IP20
Frequency [Hz]:	50 - 60	Mounting version:	suspended
Luminous flux [lm]:	3900	Working temperature [°C]:	from -20 to +35
Luminous efficacy [lm/W]:	81	Net weight [kg]:	4.200
Energy efficiency class:	F	CE certificate:	60/2014
Electrical protection class:	I	Index:	524226
Colour temperature [K]:	3000	EAN:	5905963524226
Colour rendering index:	>80	Category type:	systems
SDCM:	≤ 3	Version:	Deco LED
LED lifespan L70B50 [h]:	100000	Warranty [years]:	5
Beam angle [°]:	120	ETIM class:	EC000282
Diffuser material:	PMMA	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Diffuser type:	PRM	Manual:	Download PDF
Material of the body:	aluminium, steel		

LIGHT CURVES

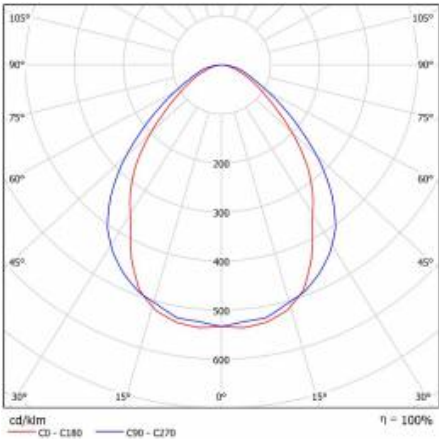


INTEGRA LED 2X24W PRM 3000K DECO LED

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
531583	
531552	
531569	
531514	
531507	
171512	SINGLE SUSPENDED CORD
171505	SINGLE ELECTRICAL SUSPENDED CORD (ROUND BOX)
171635	SINGLE SUSPENDED CORD (ROUND BOX)
171574	SINGLE ELECTRICAL SUSPENDED CORD (SQUARE BOX)
171642	SINGLE SUSPENDED CORD (SQUARE BOX)



SINGLE SUSPENDED CORD (171512)



SINGLE ELECTRICAL SUSPENDED CORD (ROUND BOX) (171505)



SINGLE SUSPENDED CORD (ROUND BOX) (171635)



SINGLE ELECTRICAL SUSPENDED CORD (SQUARE BOX) (171574)



SINGLE SUSPENDED CORD (SQUARE BOX) (171642)

Card creation date: 06 December 2018
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 60/2014