

# TERRA 2 LED N-MAG 595X595MM X4 840 WHITE GLOSS (MULTIWATT 24-36W)

DETAILED CARD



## TECHNICAL PARAMETERS

Index:	991165
Ingress protection:	IP20
Colour temperature [K]:	4000
Colour rendering index:	>80
SDCM:	≤ 3
Material of the body:	powder coated steel
Beam angle [°]:	90
Supply voltage [V]:	220 - 240
Working temperature [°C]:	from -20 to +35

## CHARACTERISTICS

Square LED luminaire with high total luminous Flux. Made of powder-coated white steel sheet. The luminaire has a patented HE reflector installed, which ensures efficiency and effectively eliminates glare. Available mounting versions: surface mounted, surface mounted on neodymium magnets (magnet ver. / N-MAG), flush-mounted in modular or KG ceilings (using an adapter) or suspended. In the surface-mounted version, solutions influencing the speed and safety of installation were used. In addition, the versions with neodymium magnets shorten the installation time of surface-mounted versions to an absolute minimum.

The MULTI luminaire version allows individual configuration: thanks to the built-in micoswitch, it is possible to choose one of three settings (nominal power of the fitting [W] / luminous flux of the fitting [lm]).

UGR <19

Unified Glare Rating is an indicator characterizing glare. The lower the Unified Lighting Rating Index (UGR), the lower the glare. In the case of luminaires designed for office spaces, UGR <19, among others improves comfort of work, reduces errors and fatigue. The UGR value also depends on many factors characterizing the room and the location of the observer. Special computer programs should be used to precisely determine the degree of glare for specific conditions.

## APPLICATION

General purpose recessed luminaire for indoor application in offices or other utility rooms. Appropriate as the main light source even when the work requires eyesight concentration.


# TERRA 2 LED N-MAG 595X595MM X4 840 WHITE GLOSS (MULTIWATT 24-36W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	991165	Material of the body:	powder coated steel
Light source:	LED module	Colour of the body:	white gloss
Nominal power [W] - range:	24/36	Dimensions (H/W/T/S) [mm]:	595/595/36
Rated power of the luminaire [W]:	40	Ingress protection:	IP20
Luminous flux of the luminaire [lm] - range:	3000/4200	Mounting version:	surface (magnet ver.)
Supply voltage [V]:	220 - 240	Working temperature [°C]:	from -20 to +35
Frequency [Hz]:	50 - 60	Category type:	louvres
Energy efficiency class:	A+	Version:	4x1
Electrical protection class:	II	LED lifespan L70B50 [h]:	132000
Colour temperature [K]:	4000	LED lifespan L80B20 [h]:	84000
Colour rendering index:	>80	LED lifespan L90B10 [h]:	42000
SDCM:	≤ 3	CE certificate:	<a href="#">288/2023</a>
Power factor:	0.95	Manual:	<a href="#">Download PDF</a>
Optics:	HE		

## LIGHT CURVES

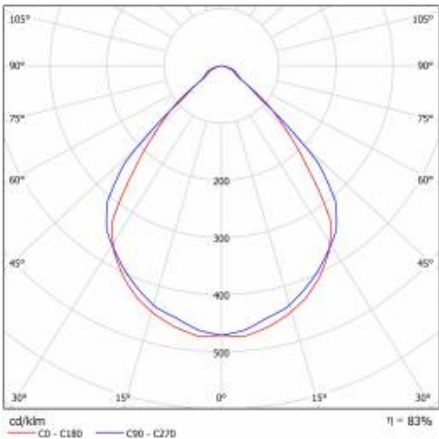


# TERRA 2 LED N-MAG 595X595MM X4 840 WHITE GLOSS (MULTIWATT 24-36W)

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
374845	Frame adapter KG 635x635 WHITE
998966	Frame steel white structure RAL9016 600x600 SM "well effect"
998973	Frame steel white gloss RAL9016 600x600 SM "well effect"



Frame steel white structure RAL9016 600x600 SM "well effect" (998966)



Frame steel white gloss RAL9016 600x600 SM "well effect" (998973)

Card creation date:19 June 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric andelectronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 288/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl