

BARIS LED KINKIET 2700LM PRM I CL. IP20 579MM 840 19W ANODE CO SWITCH

DETAILED CARD



TECHNICAL PARAMETERS

CHARACTERISTICS

A luminaire with a very narrow cross-section. The bodies are available as an anodised aluminium profile in grey or as an aluminium profile painted in white or black (other colours available on request). Optical system in the form of an opal cover. The optical system in the form of a prismatic diaphragm reduces glare and is characterized by a greater light transmittance than the opal diffuser, which has a direct impact on a higher value of luminous efficacy.

APPLICATION

The unique design predisposes these luminaires to illuminate: offices, conference rooms, and other representative spaces, in offices, passageways, sanitary rooms, and bathrooms (wall lamps), in public utility buildings.

Versions marked "VD" are only intended for use in traffic zones and corridors inside buildings included in Table 5.1 of EN12464.


BARIS LED KINKIET 2700LM PRM I CL. IP20 579MM 840 19W ANODE CO SWITCH

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Plik LDT:	Download
-----------	--------------------------

LIGHT CURVES

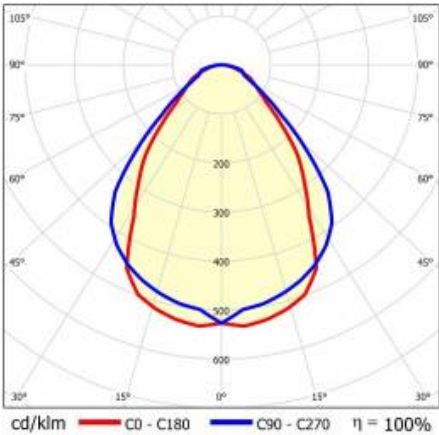

Card creation date: 24 July 2026
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 07/2022