

VECTOR 3 LED 1161MM 4150LM PRM MAT IP40 840 (32W)

DETAILED CARD



TECHNICAL PARAMETERS

Ingress protection:	IP40
Impact resistance:	IK07
Nominal power [W]:	32
Luminous flux [lm]*:	4150
Colour temperature [K]:	4000
Material of the body:	powder coated steel
Colour of the body:	white
Diffuser material:	PC
Diffuser type:	PRM MAT
Mounting version:	surface

CHARACTERISTICS

Surface mounted luminaire made of powder coated white steel with prismatic or prismatic mat PC diffuser providing soft & uniform light. Equipped with LED modules with high luminous efficacy and SDCM <3. The luminaire in standard version has a 5 pole terminal block, that enables quick through-wiring, and strain relief.

APPLICATION

Multi-purpose LED luminaire designed for indoor application. Especially recommended for public rooms and corridors (administration buildings, schools, universities and health care buildings).


VECTOR 3 LED 1161MM 4150LM PRM MAT IP40 840 (32W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	661235	Colour of the body:	white
Light source:	LED module	Dimensions (H/W/T/S) [mm]:	1161/61/125
Nominal power [W]:	32	Impact resistance:	IK07
Luminous flux [lm]:	4150	Ingress protection:	IP40
Energy efficiency class:	E	Mounting version:	surface
Electrical protection class:	I	Working temperature [°C]:	from -15 to +35
Colour temperature [K]:	4000	Net weight [kg]:	1.700
Color rendering index (Ra) >:	80	Warranty [years]:	5
LED lifespan L70B50 [h]:	116000	CE certificate:	310/2023
LED lifespan L80B10 [h]:	72000	PZH certificate:	B-BK-60212-0019/20
LED lifespan L90B10 [h]:	35000	Manual:	Manual
Diffuser material:	PC	Plik LDT:	Download
Diffuser type:	PRM MAT		
Material of the body:	powder coated steel		

LIGHT CURVES

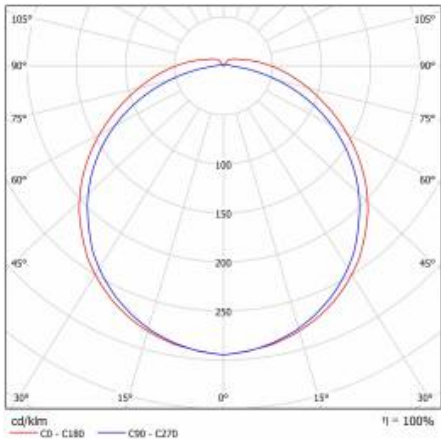

Card creation date:13 October 2022
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 310/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl