

# CORAL LED EVO 260MM N 690LM IP44 RCR 830 (9W)

BULKHEADS

LED



LED |  IP44 |  IK10

## TECHNICAL PARAMETERS

Index:	223853
Ingress protection:	IP44
Nominal power [W]:	9
Luminous flux [lm]*:	690
Colour temperature [K]:	3000
SDCM:	≤ 3
Energy efficiency class:	A
Material of the body:	PP
Ring material:	PP
Diffuser material:	PC

\*Tolerance +/- 10%


## CHARACTERISTICS

Ceiling lights for ceiling or wall mounting. Luminaire design allows surface and concealed installation. The unique design allows replacement of the LED GO! (light source) module without having to replace the entire luminaire. Integrated design for easy installation. Surface-mounted luminaire allows cable termination.

## APPLICATION

Suspended mounting board allows quick installation. Removable mounting board available on request as a service kit. Surface wiring. Holes for connection with surface installation, through-wiring possible.

## LIGHT CURVES

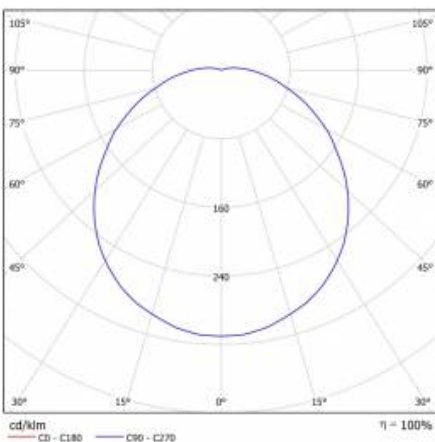

## CORAL LED EVO 260MM N 690LM IP44 RCR 830 (9W)

BULKHEADS

LED

## TECHNICAL PARAMETERS TABLE

Light source:	LED module	Mounting dimensions [mm]:	60
Nominal power [W]:	9	Impact resistance:	IK10
Rated power of the luminaire [W]:	10.90	Ingress protection:	IP44
Supply voltage [V]:	220-240	Mounting version:	surface
Frequency [Hz]:	50 - 60	Working temperature [°C]:	from -20 to +35
Luminous flux [lm]:	690	Motion sensor:	yes
Luminous efficacy [lm/W]:	71	Net weight of the luminaire [kg]:	0.620
Energy efficiency class:	A	Gross weight of the luminaire [kg]:	0.840
Electrical protection class:	I	Index:	223853
Colour temperature [K]:	3000	EAN:	5905963223853
Colour rendering index:	>80	Category type:	bulkheads
SDCM:	≤ 3	Dusk sensor:	yes
Power factor:	0.61	Product line:	CORAL LED EVO
Max load (RCR) [W]:	400	AC voltage range [V]:	220 - 240
Exchangeable source:	yes	LED lifespan L70B50 [h]:	86000
Diffuser material:	PC	LED lifespan L80B20 [h]:	54000
Diffuser type:	OPAL	LED lifespan L90B10 [h]:	26000
Optics material:	PMMA	CE certificate:	73/2018
Material of the body:	PP	ETIM class:	EC002892
Colour of the body:	white	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Ring material:	PP	Manual:	<a href="#">Download PDF</a>
Ring colour:	white		
Dimensions [mm]:	∅260/108		

## TECHNICAL DETAILS



CORAL LED natynkowe prowadzenie przewodów

\*Tolerance+/- 10%

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2021-04-10



Lena Lighting S.A.  
ul. Kórnicka 52  
63-000 Środa Wielkopolska

tel. +48 61 28 60 300  
e-mail: office@lenalighting.pl  
www.lenalighting.pl



The luminaire complies with the EU ROHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



73/2018