

CORAL LED EVO 260MM P 690LM IP44 830 (9W)

BULKHEADS

LED



LED |  IP44 | IK10

TECHNICAL PARAMETERS

Index:	223907
Ingress protection:	IP44
Nominal power [W]:	9
Luminous flux [lm]*:	690
Colour temperature [K]:	3000
SDCM:	≤ 3
Energy efficiency class:	A
Material of the body:	PP
Ring material:	PP
Diffuser material:	PC

*Tolerance +/- 10%


CHARACTERISTICS

Ceiling lights for ceiling or wall mounting. Luminaire design allows surface and concealed installation. The unique design allows replacement of the LED GO! (light source) module without having to replace the entire luminaire. Integrated design for easy installation. Surface-mounted luminaire allows cable termination.

APPLICATION

Suspended mounting board allows quick installation. Removable mounting board available on request as a service kit. Surface wiring. Holes for connection with surface installation, through-wiring possible.

LIGHT CURVES

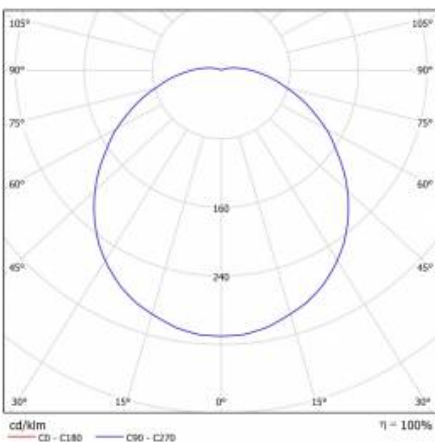

CORAL LED EVO 260MM P 690LM IP44 830 (9W)

BULKHEADS

LED

TECHNICAL PARAMETERS TABLE

Light source:	LED module	Mounting dimensions [mm]:	ø220
Nominal power [W]:	9	Impact resistance:	IK10
Rated power of the luminaire [W]:	9.90	Ingress protection:	IP44
Supply voltage [V]:	220-240	Mounting version:	recessed
Frequency [Hz]:	50 - 60	Working temperature [°C]:	from -20 to +35
Luminous flux [lm]:	690	Net weight of the luminaire [kg]:	0.660
Luminous efficacy [lm/W]:	71	Gross weight of the luminaire [kg]:	0.880
Energy efficiency class:	A	Index:	223907
Electrical protection class:	I	EAN:	5905963223907
Colour temperature [K]:	3000	Category type:	bulkheads
Colour rendering index:	>80	Product line:	CORAL LED EVO
SDCM:	≤ 3	AC voltage range [V]:	220 - 240
Power factor:	0.61	LED lifespan L70B50 [h]:	86000
Exchangeable source:	yes	LED lifespan L80B20 [h]:	54000
Diffuser material:	PC	LED lifespan L90B10 [h]:	26000
Diffuser type:	OPAL	CE certificate:	73/2018
Optics material:	PMMA	ETIM class:	EC002892
Material of the body:	PP	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Colour of the body:	white	Manual:	Download PDF
Ring material:	PP		
Ring colour:	white		
Dimensions [mm]:	ø260/108		

TECHNICAL DETAILS



CORAL LED natynkowe prowadzenie przewodów

*Tolerance+/- 10%

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2021-04-17

LENA
LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52
63-000 Środa Wielkopolska

tel. +48 61 28 60 300
e-mail: office@lenalighting.pl
www.lenalighting.pl



The luminaire complies with the EU ROHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



73/2018