

# ILUMI SPOT M 3700LM 830 IP67 I CL. 10° BLACK ALU 30W

DETAILED CARD



## TECHNICAL PARAMETERS

|   |           |
|---|-----------|
| <b>Index:</b>                             | 377105    |
| <b>Rated power of the luminaire [W]*:</b> | 30        |
| <b>Ingress protection:</b>                | IP67      |
| <b>Impact resistance:</b>                 | IK10      |
| <b>Luminous flux [lm]*:</b>               | 3700      |
| <b>Colour temperature [K]:</b>            | 3000      |
| <b>Material of the body:</b>              | aluminium |
| <b>Colour of the body:</b>                | black     |
| <b>Beam angle [°]:</b>                    | 10        |
| <b>Dimensions (H/W/T/S) [mm]:</b>         | fi194     |

## CHARACTERISTICS

The Ilumi Spot series has been designed using modern simulation methods to achieve the highest product quality. A product based on LEDs from the renowned American company CREE® IP67. The luminaire is made of ADC12 aluminium alloy. Round front. 5-year warranty. Power: 30 W.

## APPLICATION

ILUMI SPOT outdoor luminaires can be used to light and illuminate a wide range of places and objects, such as, but not limited to:

- \* parks,
- \* gardens,
- \* monuments,
- \* squares,
- \* fountains.


# ILUMI SPOT M 3700LM 830 IP67 I CL. 10° BLACK ALU 30W

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

|                                   |               |                            |                              |
|-----------------------------------|---------------|----------------------------|------------------------------|
| Index:                            | 377105        | Ring colour:               | black                        |
| EAN:                              | 5905963377105 | Dimensions (H/W/T/S) [mm]: | f1194                        |
| Light source:                     | COB LED       | Impact resistance:         | IK10                         |
| Rated power of the luminaire [W]: | 30            | Ingress protection:        | IP67                         |
| Supply voltage [V]:               | 220 - 240     | Working temperature [°C]:  | from -20 to +55              |
| Frequency [Hz]:                   | 50 - 60       | Control:                   | ON/OFF                       |
| Luminous flux [lm]:               | 3700          | Wire type:                 | H07RN-F 3G1                  |
| Electrical protection class:      | I             | Cable length [m]:          | 0.50                         |
| Colour temperature [K]:           | 3000          | Category type:             | accent lighting              |
| Colour rendering index:           | 80            | LED lifespan L90B10 [h]:   | 60000                        |
| Beam angle [°]:                   | 10            | Warranty [years]:          | 5                            |
| Material of the body:             | aluminium     | CE certificate:            | <a href="#">79/2024</a>      |
| Colour of the body:               | black         | Manual:                    | <a href="#">Download PDF</a> |
| Ring material:                    | aluminium     |                            |                              |

## LIGHT CURVES

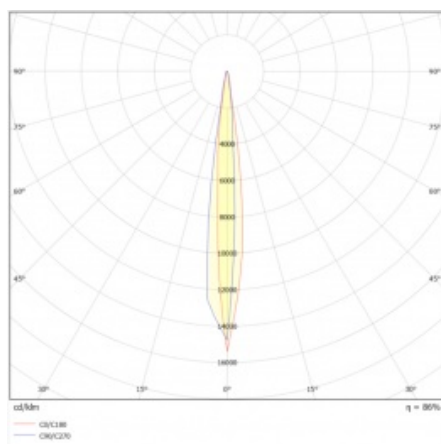

Card creation date: 11 September 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 79/2024



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl