


# NECTRA LED 5W 4000K WHITE

DETAILED CARD

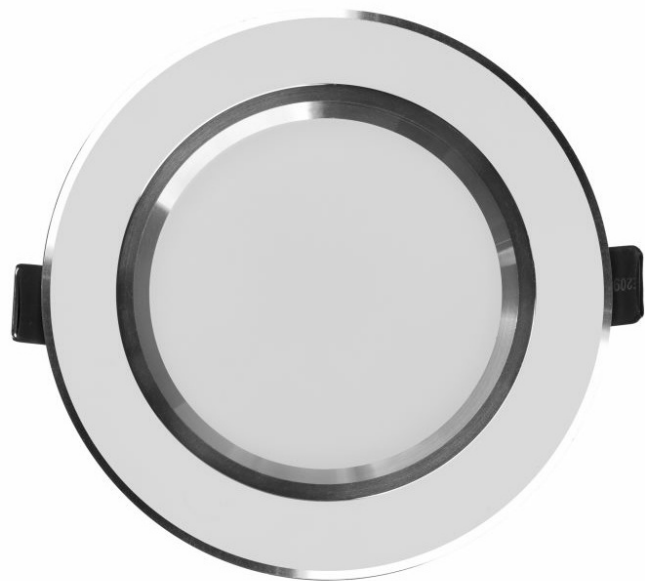

## TECHNICAL PARAMETERS

|                          |           |
|--------------------------|-----------|
| Index:                   | 059537    |
| Ingress protection:      | IP44/20   |
| Nominal power [W]:       | 5         |
| Luminous flux [lm]*:     | 370       |
| Colour temperature [K]:  | 4000      |
| Colour rendering index:  | >80       |
| Energy efficiency class: | F         |
| Material of the body:    | aluminium |
| Colour of the body:      | white     |
| Diffuser material:       | PC        |

## CHARACTERISTICS

Downlight type fitting with an integrated energy-saving LED source. Made of lightweight aluminium and plastic. Available in two ringcolours and three power versions. Its distinctive features are low profile, light weight and very easy and fast installation.

## APPLICATION

Design for both solid and modular ceilings.

# NECTRA LED 5W 4000K WHITE

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

|                                   |            |                           |   |
|-----------------------------------|------------|---------------------------|---|
| Nominal power [W]:                | 5          | Mounting dimensions [mm]: | ø80   |
| Light source:                     | LED module | Impact resistance:        | IK08  |
| Colour temperature [K]:           | 4000       | Ingress protection:       | IP44/20   |
| Luminous flux [lm]:               | 370        | Mounting version:         | recessed  |
| Rated power of the luminaire [W]: | 5          | Working temperature [°C]: | from -15 to +35   |
| Diffuser type:                    | OPAL       | Net weight [kg]:          | 0.120   |
| Supply voltage [V]:               | 220-240    | CE certificate:           | <a href="#">42/2020</a>   |
| Dimensions (H/W/T/S) [mm]:        | ø108/51    | Index:                    | 059537  |
| Frequency [Hz]:                   | 50 - 60    | Warranty [years]:         | 5   |
| Energy efficiency class:          | F          | EAN:                      | 5905963059537   |
| Luminous efficacy [lm/W]:         | 74         | Category type:            | downlights  |
| Electrical protection class:      | II         | ETIM class:               | EC002892  |
| Colour rendering index:           | >80        | Photobiological safety:   | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| LED lifespan L70B50 [h]:          | 30000      | LED lifespan L80B20 [h]:  | 20000   |
| Beam angle [°]:                   | 120        | LED lifespan L90B10 [h]:  | 10000   |
| Diffuser material:                | PC         | Manual:                   | <a href="#">Download PDF</a>  |
| Material of the body:             | aluminium  | Plik LDT:                 | <a href="#">Download</a>  |
| Colour of the body:               | white      |                           |   |

# NECTRA LED 5W 4000K WHITE

DETAILED CARD

## ACCESSORIES AVAILABLE

| index  | Name  |
|--------|---|
| 059735 | Round surface casing white NECTRA LED IP44 15W. NECTRA LED 12W                  |
| 059759 | Round surface casing white NECTRA LED IP44 20W. 25W. NECTRA LED 18W             |
| 059858 | Round surface casing - white. 15W   |
| 059841 | Round surface casing white NECTRA LED IP44 5W. NECTRA LED 5W. 7W, FRAGA LED 11W |
| 060922 | Round surface casing white NECTRA LED IP44 9W. NECTRA LED 7W, FRAGA 11W         |



Round surface casing white NECTRA LED IP44 15W. NECTRA LED 12W (059735)



Round surface casing white NECTRA LED IP44 20W. 25W. NECTRA LED 18W (059759)



Round surface casing - white. 15W (059858)



Round surface casing white NECTRA LED IP44 5W. NECTRA LED 5W. 7W, FRAGA LED 11W (059841)



Round surface casing white NECTRA LED IP44 9W. NECTRA LED 7W, FRAGA 11W (060922)

Card creation date:10 January 2025  
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric andelectronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 42/2020