

SOLARIS LED 48W PRM 4000K 660X660MM RAL 9006

DETAILED CARD



TECHNICAL PARAMETERS

Index:	009402
Ingress protection:	IP40
Nominal power [W]:	48
Luminous flux [lm]*:	5050
Energy efficiency class:	A
Material of the body:	powder coated steel
Diffuser material:	PMMA

CHARACTERISTICS

Surface mounted square LED luminaire with high total luminous flux (83 lm/W), made of powder coated white steel sheet, equipped with energy saving light sources LEDGO!, high uniformity opal/prismatic optic providing low glare.

APPLICATION

General purpose surface mounted luminaire for indoor application in offices or other utility rooms. Appropriate as the main light source even when the work requires eyesight concentration.


SOLARIS LED 48W PRM 4000K 660X660MM RAL 9006

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Nominal power [W]:	48	Material of the body:	powder coated steel
Index:	009402	Dimensions (H/W/T/S) [mm]:	660/660/85
Colour temperature [K]:	4000	Ingress protection:	IP40
Light source:	LED module	Mounting version:	surface
Luminous flux [lm]:	5050	Working temperature [°C]:	from -25 to +35
Diffuser type:	PRM	Net weight [kg]:	5.350
Luminous efficacy [lm/W]:	95	Warranty [years]:	5
Supply voltage [V]:	220-240	CE certificate:	33/2013
Frequency [Hz]:	50 - 60	PZH certificate:	HK/B/0902/01/2014
Colour of the body:	silver	EAN:	5905963009402
Energy efficiency class:	A	Category type:	louvres
Electrical protection class:	I	ETIM class:	EC002892
LED lifespan L70B50 [h]:	50000	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Diffuser material:	PMMA	Manual:	Download PDF

LIGHT CURVES

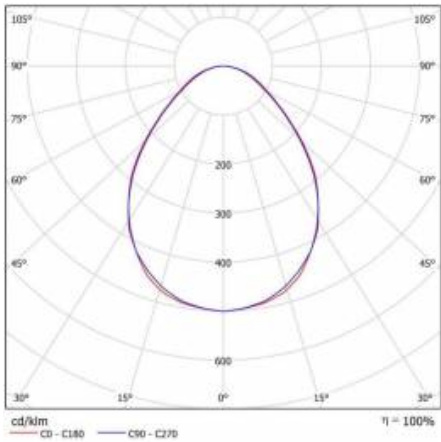

SOLARIS LED 48W PRM 4000K 660X660MM RAL 9006

DETAILED CARD

TECHNICAL DETAILS



SOLARIS LED PRM DETAL

Card creation date: 06 December 2018

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric andelectronic waste equipment regulations (WEEE).



Certificate CE - Nr: 33/2013



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl