


SPECTO LED EVO 595MM 1350LM PRM MAT IP40 830 (15W)

DETAILED CARD

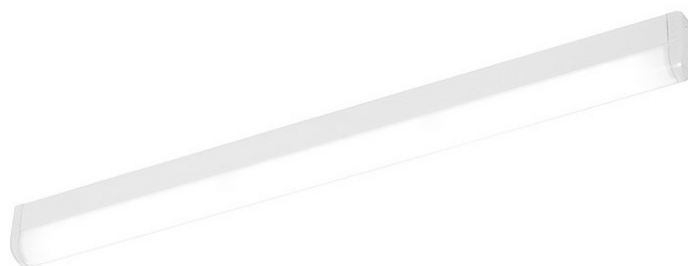

TECHNICAL PARAMETERS

Index:	636493
Ingress protection:	IP40
Impact resistance:	IK02
Nominal power [W]:	15
Luminous flux [lm]*:	1350
Colour temperature [K]:	3000
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	F
Material of the body:	steel

CHARACTERISTICS

Surface ceiling or wall mounted, high performance LED luminaire with compact space saving construction. Equipped with energy saving light sources LED. Powderpainted steel base, special multilayer prismatic diffuser combining high UV resistance PMMA cover and polypropylene optic system or single layer high UV resistance opal PMMA diffuser.

APPLICATION

Multi-purpose LED luminaire designed for indoor application for illuminating public use areas and corridors (administration buildings, schools and universities, health care buildings) Especially recommended for small space application or as complementary lighting. It is appropriate for new applications as well as replacing conventional T8 & T5 fittings on energy saving LED solutions. Fitting construction adapted for surface mounting (ceiling or wall) using included accessory installation kit.

