


# SPECTO LED EVO 595MM 1750LM PRM IP40 840 (15W)

DETAILED CARD

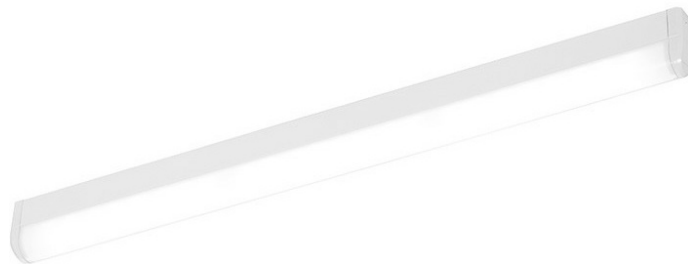

## TECHNICAL PARAMETERS

<b>Index:</b>	636400
<b>Ingress protection:</b>	IP40
<b>Impact resistance:</b>	IK02
<b>Nominal power [W]:</b>	15
<b>Luminous flux [lm]*:</b>	1750
<b>Colour temperature [K]:</b>	4000
<b>Color rendering index (Ra) &gt;:</b>	80
<b>SDCM:</b>	3
<b>Energy efficiency class:</b>	E
<b>Material of the body:</b>	steel

## CHARACTERISTICS

Surface-mounted, ceiling or wall-mounted compact led luminaire with high performance, characterized by a compact design. It is equipped with energy-saving LED modules. The steel, powder-coated luminaire is available with a UV-resistant diffuser.

## APPLICATION

Multi-purpose LED luminaire designed for indoor application for illuminating public use areas and corridors (administration buildings, schools and universities, health care buildings) Especially recommended for small space application or as complementary lighting. It is appropriate for new applications as well as replacing conventional T8 & T5 fittings on energy saving LED solutions. Fitting construction adapted for surface mounting (ceiling or wall) using included accessory installation kit.


# SPECTO LED EVO 595MM 1750LM PRM IP40 840 (15W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

<b>Index:</b>	636400	<b>Material of the body:</b>	steel
<b>EAN:</b>	5905963636400	<b>Colour of the body:</b>	white
<b>Light source:</b>	LED module	<b>Dimensions (H/W/T/S) [mm]:</b>	595/45/84
<b>Nominal power [W]:</b>	15	<b>Mounting dimensions [mm]:</b>	222
<b>Rated power of the luminaire [W]:</b>	16	<b>Impact resistance:</b>	IK02
<b>Supply voltage [V]:</b>	220-240	<b>Ingress protection:</b>	IP40
<b>Frequency [Hz]:</b>	50 - 60	<b>Mounting version:</b>	surface
<b>Luminous flux [lm]:</b>	1750	<b>Working temperature [°C]:</b>	from -17 to +35
<b>Luminous efficacy [lm/W]:</b>	109	<b>Number on the palette [pcs]:</b>	200
<b>Energy efficiency class:</b>	E	<b>Net weight [kg]:</b>	0.800
<b>Electrical protection class:</b>	I	<b>Category type:</b>	battens
<b>Colour temperature [K]:</b>	4000	<b>ETIM class:</b>	EC000109
<b>Color rendering index (Ra) &gt;:</b>	80	<b>Photobiological safety:</b>	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
<b>SDCM:</b>	3	<b>Warranty [years]:</b>	5
<b>LED lifespan L70B50 [h]:</b>	50000	<b>CE certificate:</b>	<a href="#">337/2023</a>
<b>Diffuser material:</b>	PMMA	<b>Manual:</b>	<a href="#">Download PDF</a>
<b>Diffuser type:</b>	PRM	<b>Plik LDT:</b>	<a href="#">Download</a>

## LIGHT CURVES

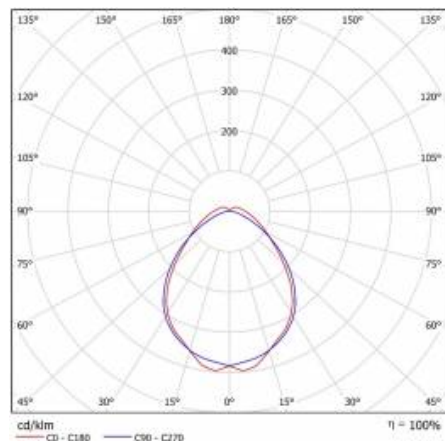

Card creation date: 27 February 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 337/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl