

# MIMO LED 1230MM 3350LM IP66 840 (23W)

DETAILED CARD



## TECHNICAL PARAMETERS

Index:	100963
Ingress protection:	IP66
Impact resistance:	IK06
Nominal power [W]:	23
Luminous flux [lm]*:	3350
Colour temperature [K]:	4000
Colour rendering index:	>80
SDCM:	≤ 3
Electrical protection class:	II
Energy efficiency class:	D

## CHARACTERISTICS

MIMO LED represents the new generation of hermetic LED luminaires with very high IP66 tightness. The luminaire uses modern concepts to improve light distribution and temperature balance. Its design involved both proven solutions that affect high efficiency and durability, as well as efficient LED modules offering the best lighting level required and energy savings of up to 66%. The multilayer shade has been made of UV-resistant polycarbonate.

## APPLICATION

The multifunctional LED luminaire is designed for use in areas with increased dust and humidity. It is particularly suitable for industrial conditions, car parks (underground and multi-storey ones), sports stadiums, warehouses, transport terminals and underground passages. The luminaire is used both in new applications, as well as in replacing traditional fluorescent luminaires with energy-saving LED solutions. Its design is adapted for surface and suspended installation using standard equipment.


# MIMO LED 1230MM 3350LM IP66 840 (23W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Nominal power [W]:	23	Power factor:	0.92
Index:	100963	Diffuser material:	PC
Colour temperature [K]:	4000	Material of the body:	PC
EAN:	5905963100963	Mounting dimensions [mm]:	1270/57/37
Luminous flux [lm]:	3350	Impact resistance:	IK06
Light source:	LED module	Ingress protection:	IP66
Diffuser type:	OPAL	Mounting version:	surface, suspended
Rated power of the luminaire [W]:	25	Net weight [kg]:	0.400
Dimensions (H/W/T/S) [mm]:	1230/55/35	Category type:	battens
Supply voltage [V]:	220-240	LED lifespan L70B50 [h]:	100000
Energy efficiency class:	D	CE certificate:	<a href="#">175/2017</a>
Frequency [Hz]:	50 - 60	ETIM class:	EC000109
Luminous efficacy [lm/W]:	134	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Electrical protection class:	II	Warranty [years]:	5
Colour rendering index:	>80	Warranty [years]:	2
SDCM:	≤ 3	Manual:	<a href="#">Download PDF</a>
		Plik LDT:	<a href="#">Download</a>

## LIGHT CURVES

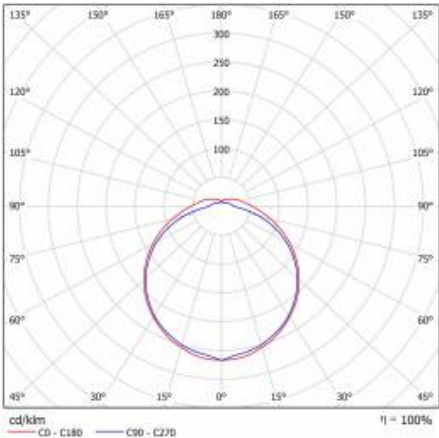

Card creation date: 30 March 2021

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 175/2017



**LENA**  
LIGHTING

Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)