

MIMO LED 1230MM 3350LM IP66 840 (23W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	100963
Ingress protection:	IP66
Impact resistance:	IK06
Nominal power [W]:	23
Luminous flux [lm]*:	3350
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
SDCM:	3
Electrical protection class:	II
Energy efficiency class:	D

CHARACTERISTICS

MIMO LED represents the new generation of hermetic LED luminaires with very high IP66 tightness. The luminaire uses modern concepts to improve light distribution and temperature balance. Its design involved both proven solutions that affect high efficiency and durability, as well as efficient LED modules offering the best lighting level required and energy savings of up to 66%. The multilayer shade has been made of UV-resistant polycarbonate.

APPLICATION

The multifunctional LED luminaire is designed for use in areas with increased dust and humidity. It is particularly suitable for industrial conditions, car parks (underground and multi-storey ones), sports stadiums, warehouses, transport terminals and underground passages. The luminaire is used both in new applications, as well as in replacing traditional fluorescent luminaires with energy-saving LED solutions. Its design is adapted for surface and suspended installation using standard equipment.


MIMO LED 1230MM 3350LM IP66 840 (23W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	100963	Material of the body:	PC
EAN:	5905963100963	Dimensions (H/W/T/S) [mm]:	1230/55/35
Light source:	LED module	Mounting dimensions [mm]:	1270/57/37
Nominal power [W]:	23	Impact resistance:	IK06
Rated power of the luminaire [W]:	25	Ingress protection:	IP66
Supply voltage [V]:	220-240	Mounting version:	surface, suspended
Frequency [Hz]:	50 - 60	Net weight [kg]:	0.400
Luminous flux [lm]:	3350	Category type:	battens
Luminous efficacy [lm/W]:	134	LED lifespan L70B50 [h]:	100000
Energy efficiency class:	D	CE certificate:	175/2017
Electrical protection class:	II	ETIM class:	EC000109
Colour temperature [K]:	4000	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Color rendering index (Ra) >:	80	Warranty [years]:	5
SDCM:	3	Warranty [years]:	2
Power factor:	0.92	Manual:	Download PDF
Diffuser material:	PC	Plik LDT:	Download
Diffuser type:	OPAL		

LIGHT CURVES

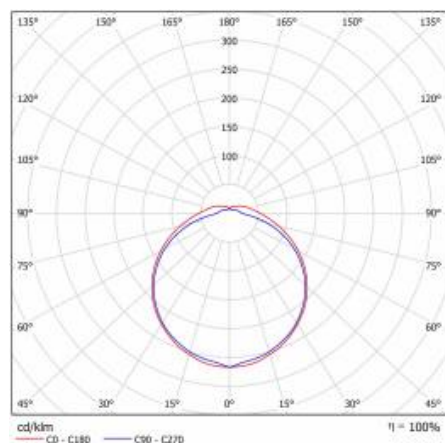

Card creation date: 30 March 2021

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 175/2017



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl