

ASTRA LED BASIC 4400LM 840 IP66 I CL. SP10KV 32W

DETAILED CARD



TECHNICAL PARAMETERS

Index:	664670
Ingress protection:	IP66
Impact resistance:	IK08
Luminous flux [lm]*:	4400
Rated power of the luminaire [W]*:	32
Colour temperature [K]:	4000
SDCM:	3
Color rendering index (Ra) >:	80
Electrical protection class:	I
Energy efficiency class:	C

CHARACTERISTICS

Streetlight LED fitting with high luminous flux (max 173 lm/W) and an integrated energy-saving LED module. The self-cleaning body made of polypropylene (PP) with fibreglass (FG) and the grip made of aluminium. Thanks to the directional lens (made of PC), the light distribution meets the requirements of PN-EN 13201 lighting class. IP66 ingress protection class and IK08 impact-rating features make this fitting extremely tight and shock-resistant (vandal-resistant). Integrated, step-regulated grip allows to set the fitting by 5 degrees in the range of: -5° to +15° (peak to pole); -15° to +5° (side to boom).

APPLICATION

Streetlight fitting used in open spaces to lighten: streets, local roads, bicycle paths, alleys, pavements, car parks and squares. Installation and Mounting: lateral side entry, post-top mounting. Mounting grip integrated with the fitting.


ASTRA LED BASIC 4400LM 840 IP66 I CL. SP10KV 32W

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	664670	Colour of the body:	grey
Light source:	LED module	Mounting version:	side, top
Rated power of the luminaire [W]:	32	Working temperature [°C]:	from -15 to +35
Luminous flux [lm]:	4400	Tilt angle adjustment [°]:	od -5 do +15
Luminous efficacy [lm/W]:	173	Lateral surface (SCx) [m2]:	0.018
Energy efficiency class:	C	Wire type:	H07RN-F
Electrical protection class:	I	Cable length [m]:	0.50
Colour temperature [K]:	4000	Protection type:	10
Color rendering index (Ra) >:	80	Number on the palette [pcs]:	62
SDCM:	3	Net weight [kg]:	1.900
Power factor:	0.93	Category type:	street lighting
Diffuser material:	PC	LED lifespan L70B50 [h]:	122000
Diffuser type:	matrix led	LED lifespan L80B10 [h]:	77000
Diffuser colour:	transparent	LED lifespan L90B10 [h]:	36000
Optics material:	PC	Light distribution type:	uliczny
Optics:	matrix lens	Manual:	Download PDF
Dimensions (H/W/T/S) [mm]:	640/113/233	CE certificate:	273/2023
Mounting dimensions [mm]:	ø60	Warranty [years]:	5
Material of the body:	PP + 35%GF	ENEC Certificate:	0323/ENEC/23
Ingress protection:	IP66	Category of application:	Street lighting
Impact resistance:	IK08	Plik LDT:	Download

LIGHT CURVES

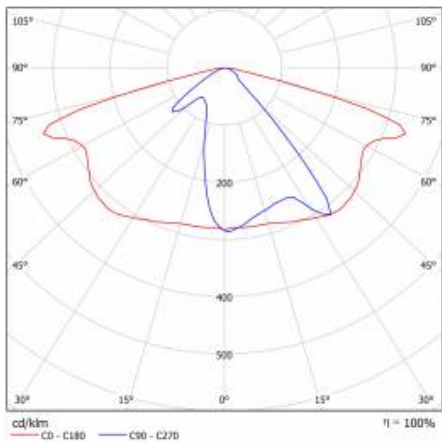

ASTRA LED BASIC 4400LM 840 IP66 I CL. SP10KV 32W

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
598357	Pole adapter 80/60 ALU
UL00214	Adjustable bracket Astra LED/Astra LED BASIC aluminium grey RAL 9006 diameter 64 mm Corona 2 LED



Pole adapter 80/60 ALU (598357)



Adjustable bracket Astra LED/Astra LED BASIC aluminium grey RAL 9006 diameter 64 mm Corona 2 LED (UL00214)

Card creation date: 29 October 2025
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 273/2023