

# QUEST 2 LED M ASN 6300LM DALI I CL. IP66 830 SP10KV (54W)

DETAILED CARD



## TECHNICAL PARAMETERS

|                                    |        |
|------------------------------------|--------|
| Index:                             | 697517 |
| Ingress protection:                | IP66   |
| Impact resistance:                 | IK09   |
| Rated power of the luminaire [W]*: | 54     |
| Luminous flux [lm]*:               | 6300   |
| Colour temperature [K]:            | 3000   |
| Color rendering index (Ra) >:      | 80     |
| SDCM:                              | 3      |
| Electrical protection class:       | I      |
| Energy efficiency class:           | D      |

## CHARACTERISTICS

High-quality floodlight with inbuilt LED source. The body is made of die-cast aluminium, powder coated in anthracite grey (RAL 7016), and the mounting bracket is made of black-painted steel. The diffuser is made of 5 mm thick tempered glass. It is equipped with directional lens matrices with 3 different light distributions: symmetrical (120°), asymmetric narrow ASN and asymmetric wide ASW. Non-corrosive mounting bracket allowing for adjustment angles between -140° to +185°. The luminaire is available in 2 sizes: M and L. Standard equipped with 0.1m long H07RN-F cable and IP66 quick connector. Wide range of accessories available: protective net, grip for the lighting pole, wall bracket.

## APPLICATION

The fitting is dedicated for lighting elevations and billboards.


# QUEST 2 LED M ASN 6300LM DALI I CL. IP66 830 SP10KV (54W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

|                                   |                 |                                          |                                                                             |
|-----------------------------------|-----------------|------------------------------------------|-----------------------------------------------------------------------------|
| Index:                            | 697517          | The number of implement units:           | 1                                                                           |
| Light source:                     | LED             | Version:                                 | M                                                                           |
| Rated power of the luminaire [W]: | 54              | Dimensions (H/W/T/S) [mm]:               | 321/424/37                                                                  |
| Supply voltage [V]:               | 220 - 240       | Impact resistance:                       | IK09                                                                        |
| Frequency [Hz]:                   | 50 - 60         | Ingress protection:                      | IP66                                                                        |
| Luminous flux [lm]:               | 6300            | Mounting version:                        | surface                                                                     |
| Luminous efficacy [lm/W]:         | 117             | Working temperature [°C]:                | from -20 to +35                                                             |
| Energy efficiency class:          | D               | Lateral surface (SCx) [m2]:              | 0.140                                                                       |
| Electrical protection class:      | I               | Net weight [kg]:                         | 4.200                                                                       |
| Colour temperature [K]:           | 3000            | LED lifespan L70B50 [h]:                 | 125000                                                                      |
| Color rendering index (Ra) >:     | 80              | LED lifespan L80B10 [h]:                 | 79000                                                                       |
| SDCM:                             | 3               | LED lifespan L90B10 [h]:                 | 38000                                                                       |
| Beam angle [°]:                   | ASN             | Cable length [m]:                        | 0.90                                                                        |
| Light distribution type:          | asymmetric ASN  | Mark D:                                  | yes                                                                         |
| Surge protection [kV]:            | 10              | Additional accessories:                  | protective grid, pole mount, wall mount                                     |
| Diffuser material:                | glass           | Photobiological safety:                  | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| Diffuser type:                    | transparent     | Warranty [years]:                        | 5                                                                           |
| Optics material:                  | PC              | CE certificate:                          | <a href="#">86/2021</a>                                                     |
| Optics:                           | lens            | PZH certificate:                         | <a href="#">B-BK-60212-0480/21</a>                                          |
| Material of the body:             | aluminium       | Environmental Product Declaration (EPD): | <a href="#">816/2025</a>                                                    |
| Colour of the body:               | anthracite grey | Manual:                                  | <a href="#">Download PDF</a>                                                |
| DIMM DALI:                        | yes             | Plik LDT:                                | <a href="#">Download</a>                                                    |

## LIGHT CURVES

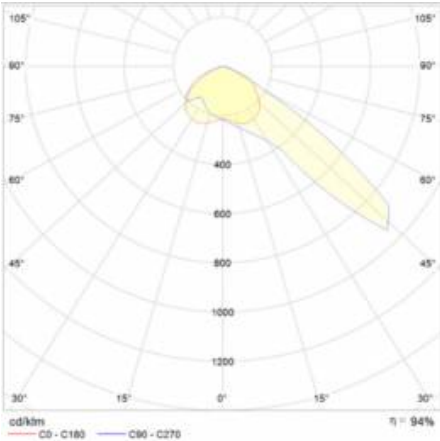


# QUEST 2 LED M ASN 6300LM DALI I CL. IP66 830 SP10KV (54W)

DETAILED CARD

## ACCESSORIES AVAILABLE

| index  | Name                                   |
|--------|----------------------------------------|
| 559938 | QUEST PLUS LED M/L wall holder RAL9006 |
| 699993 | QUEST 2 LED M - recessed frame         |
| 699986 | QUEST 2 LED L - recessed frame         |
| 699962 | QUEST 2 LED L protective grid RAL7016  |
| 699979 | QUEST 2 LED M protective grid RAL7016  |
| 965913 | QUEST 2 LED M/L MAX wall mount RAL7016 |
| 567728 | QUEST 2 LED M/L Pole holder            |




QUEST PLUS LED M/L wall holder  
RAL9006 (559938)




QUEST 2 LED M - recessed  
frame (699993)




QUEST 2 LED L - recessed  
frame (699986)




QUEST 2 LED L protective grid  
RAL7016 (699962)



QUEST 2 LED M protective grid  
RAL7016 (699979)



QUEST 2 LED M/L MAX wall mount  
RAL7016 (965913)



QUEST 2 LED M/L Pole  
holder (567728)