


# TERRA 2 LED LONG MULTI

## GENERAL CARD

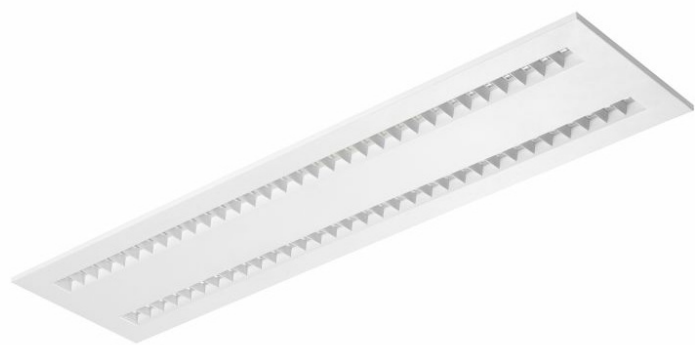

### TECHNICAL PARAMETERS

Ingress protection:	IP20
Nominal power [W] - range:	24/36; 40/44/49
Luminous flux of the luminaire [lm] - range:	2100/2800; 3000/4200; 4500/4900/5050; 4800/5200/5400
Colour temperature [K]:	3000; 4000
Colour rendering index:	80
SDCM:	≤ 3
Energy efficiency class:	A+; B; C
Material of the body:	powder coated steel
Colour of the body:	white gloss; white mat
Beam angle [°]:	90
Warranty [years]:	5

### CHARACTERISTICS

LED luminaire with high total luminous Flux. Made of powder coated white steel sheet. The luminaire has a patented HE reflector installed, which ensures efficiency and effectively eliminates glare. Available mounting versions: surface, recessed in modular and suspended. The surface-mounted version uses solutions that enhance the speed and safety of installation. A multitude of versions & dimentions allow to replace worn-out recessed fluorescent luminaires.

The MULTI luminaire version allows individual configuration: thanks to the built-in micoswitch, it is possible to choose one of three settings (nominal power of the fitting [W] / luminous flux of the fitting [lm]).

### APPLICATION

General purpose surface mounted luminaire for indoor application in offices or other utility rooms. Appropriate as the main light source even when the work requires eyesight concentration.

# TERRA 2 LED LONG MULTI

## GENERAL CARD

### AVAILABLE VERSIONS



Click index >>, to see details

#### TERRA 2 LED LONG MULTI 24/36W

Nominal power [W] - range	Colour temperature [K]	Luminous flux of the luminaire [lm] - range	Optics	Colour of the body	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
24/36	3000	2100/2800	HE	white mat	1195/300/32	B	<a href="#">&gt;&gt; 238550</a>
24/36	3000	2100/2800	HE	white gloss	1195/300/32	B	<a href="#">&gt;&gt; 238567</a>
24/36	4000	3000/4200	HE	white mat	1195/300/32	A+	<a href="#">&gt;&gt; 238093</a>
24/36	4000	3000/4200	HE	white gloss	1195/300/32	A+	<a href="#">&gt;&gt; 238109</a>

#### TERRA 2 LED LONG MULTI 40/44/49W

Nominal power [W] - range	Colour temperature [K]	Luminous flux of the luminaire [lm] - range	Optics	Colour of the body	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
40/44/49	3000	4500/4900/5050	HE	white mat	1195/300/32	C	<a href="#">&gt;&gt; 240027</a>
40/44/49	3000	4500/4900/5050	HE	white gloss	1195/300/32	C	<a href="#">&gt;&gt; 240034</a>
40/44/49	4000	4800/5200/5400	HE	white mat	1195/300/32	A+	<a href="#">&gt;&gt; 240003</a>
40/44/49	4000	4800/5200/5400	HE	white gloss	1195/300/32	A+	<a href="#">&gt;&gt; 240010</a>

Card creation date: 24 March 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 355/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)