
PLANO LED EVO

GENERAL CARD

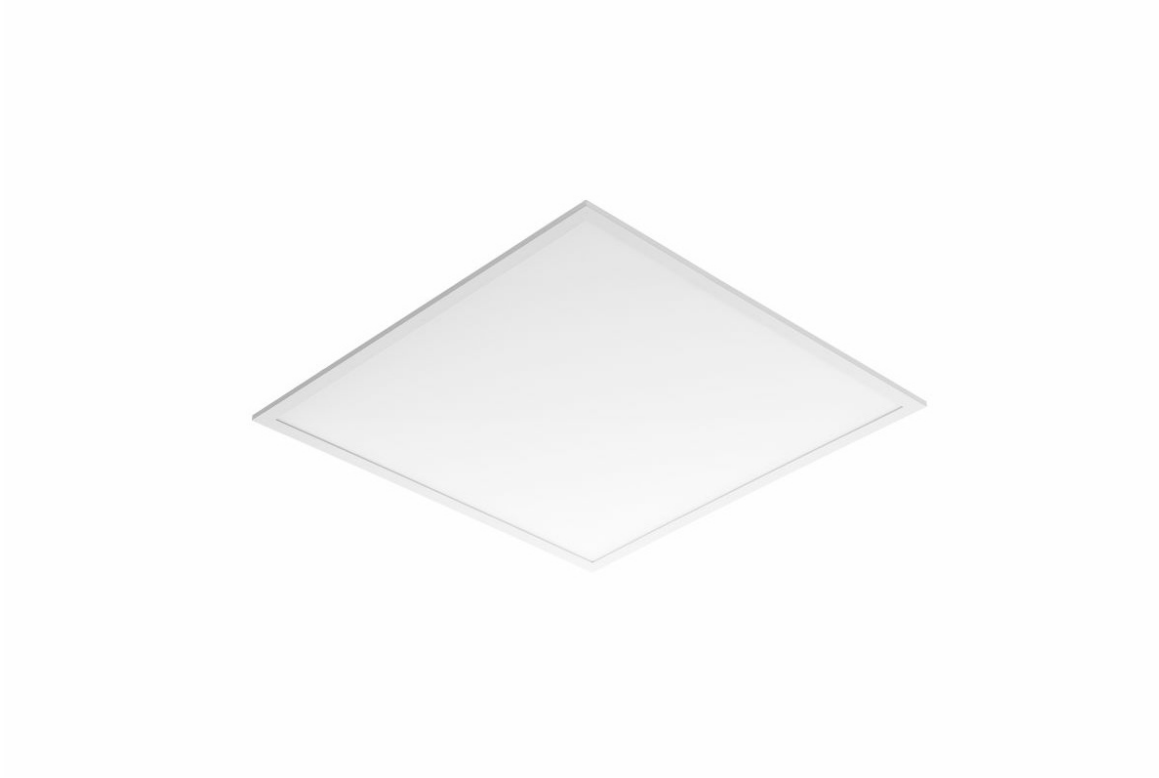

TECHNICAL PARAMETERS

Ingress protection:	IP40; IP40/20; IP40/IP20
Impact resistance:	IK07
Nominal power [W]:	30.00 - 54.00
Colour temperature [K]:	3000; 4000; 6000
Luminous flux [lm]*:	3000 - 5700
Energy efficiency class:	E; F
Material of the body:	aluminium
Diffuser material:	PMMA; PS
Diffuser type:	OPAL; PRM
UGR (4H8H):	<19
Mounting version:	recessed; recessed, surface
Dimensions (H/W/T/S) [mm]:	595/595/9; 1195/295/9; 620/620/9;
Warranty [years]:	2; 5

CHARACTERISTICS

Versatile LED luminaire characterized by low profile with smooth and elegant design, for recessed modular ceiling systems. Luminaire with built-in energy saving LED light source, made from aluminium (white colour), equipped with multilayer PS diffuser OPAL or PRM providing perfect light dispersion and low glare (**UGR<19** for PRM). Mounting method: recessed and surface mounted - using a frame (available as an accessory).

APPLICATION

Luminaire for indoor application in offices (studies, conference rooms) or general use in representative areas. Unique design and perfect lighting parameters alow applying PLANO LED EVO as the main light source even when the work requires eyesight concentration. It is appropriate for new applications as well as for replacing conventional T8 & T5 fittings with energy-saving LED solutions. Designed to be mounted in modular ceiling 600x600.

PLANO LED EVO

GENERAL CARD

AVAILABLE VERSIONS

Click index >>, to see details

PLANO LED EVO 1195/295/9mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	UGR (4H8H)	Dimensions (H/W/T/S) [mm]	Index
36	4000	3700	PRM	yes	<19	1195/295/9	>> 560330
36	4000	3700	PRM		<19	1195/295/9	>> 552236
36	4000	4500	OPAL			1195/295/9	>> 314933
36	4000	4000	OPAL			1195/295/9	>> 552878

PLANO LED EVO 595/595/9mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	UGR (4H8H)	Dimensions (H/W/T/S) [mm]	Index
30	4000	3860	PRM		<19	595/595/9	>> 560255
30	4000	3000	OPAL			595/595/9	>> 552328
36	3000	4300	PRM		<19	595/595/9	>> 560248
36	6000	4000	OPAL			595/595/9	>> 552991
36	3000	4000	OPAL			595/595/9	>> 552298
36	4000	4000	OPAL			595/595/9	>> 552861
36	4000	4000	OPAL	yes		595/595/9	>> 552823
36	4000	4000	OPAL			595/595/9	>> 552281
36	4000	4000				595/595/9	>> 314926
36	4000	4000				595/595/9	>> 314896
37	3000	3200	OPAL			595/595/9	>> 314827
54	4000	5700	OPAL			595/595/9	>> 552342
54	4000	5700	OPAL			595/595/9	>> 552854
54	4000	5700	OPAL	yes		595/595/9	>> 552816

PLANO LED EVO 620/620/9mm


Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	UGR (4H8H)	Dimensions (H/W/T/S) [mm]	Index
36	4000	3700	PRM		<19	620/620/9	>> 552267
36	3000	3700	PRM	yes	<19	620/620/9	>> 560293
36	3000	3700	PRM		<19	620/620/9	>> 552274
36	3000	4000	OPAL			620/620/9	>> 552250

PLANO LED EVO


GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
374845	Frame adapter KG 635x635 WHITE
552410	PLANO LED EVO - surface frame 600x600x43
998973	Frame steel white gloss RAL9016 600x600 SM "well effect"
552427	PLANO LED EVO - surface frame 1200x300x43
552403	PLANO LED EVO - hanging string set (4pcs)
552397	PLANO LED EVO - plasterboard clip set (4pcs)
315060	Emergency module 2W/10-50V Li-ION EMG-A-Li-2L 3h 3.6V 2.5Ah AT - PLANO (GKO)



Frame adapter KG 635x635 WHITE (374845)



Frame steel white gloss RAL9016 600x600 SM "well effect" (998973)

Card creation date: 13 October 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 365/2023

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl