


PLANO LED EVO

GENERAL CARD

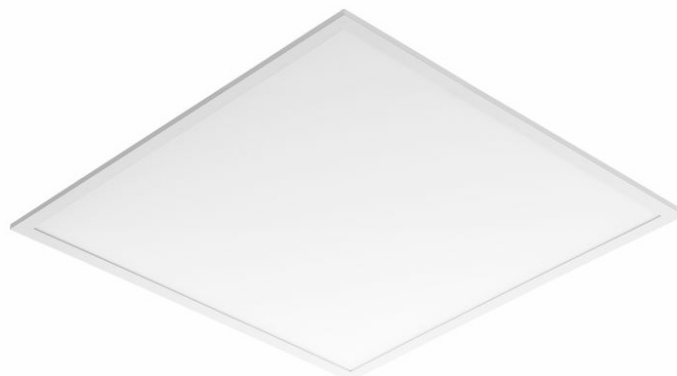

TECHNICAL PARAMETERS

Ingress protection:	IP40/IP20
Impact resistance:	IK07
Nominal power [W]:	30.00 - 54.00
Colour temperature [K]:	3000; 4000
Luminous flux [lm]*:	3000 - 5700
Energy efficiency class:	E
Material of the body:	aluminium
Diffuser material:	PMMA; PS
Diffuser type:	OPAL; PRM
UGR (4H8H):	<19
Mounting version:	recessed, surface
Dimensions (H/W/T/S) [mm]:	595/595/9; 1195/295/9; 620/620/9;
Warranty [years]:	2; 5

CHARACTERISTICS

Versatile LED luminaire characterized by low profile with smooth and elegant design, for recessed modular ceiling systems. Luminaire with built-in energy saving LED light source, made from aluminium (white colour), equipped with multilayer PS diffuser OPAL or PRM providing perfect light dispersion and low glare (**UGR<19** for PRM). Mounting method: recessed and surface mounted - using a frame (available as an accessory).

APPLICATION

Luminaire for indoor application in offices (studies, conference rooms) or general use in representative areas. Unique design and perfect lighting parameters allow applying PLANO LED EVO as the main light source even when the work requires eyesight concentration. It is appropriate for new applications as well as for replacing conventional T8 & T5 fittings with energy-saving LED solutions. Designed to be mounted in modular ceiling 600x600.

PLANO LED EVO

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

PLANO LED EVO 1195/295/9mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	UGR (4H8H)	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
30	4000	3500	OPAL			1195/295/9	E	>> 552212
36	4000	3700	PRM		<19	1195/295/9	E	>> 552236
36	4000	3700	PRM	yes	<19	1195/295/9	E	>> 560330
36	4000	4000	OPAL			1195/295/9	E	>> 552229
36	4000	4000	OPAL			1195/295/9	E	>> 552878
36	4000	4000	OPAL	yes		1195/295/9	E	>> 552830
36	4000	4500	OPAL			1195/295/9	E	>> 314933

PLANO LED EVO 595/595/9mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	UGR (4H8H)	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
30	4000	3000	PRM		<19	595/595/9	E	>> 552335
30	4000	3000	PRM	yes	<19	595/595/9	E	>> 560323
30	4000	3860	PRM		<19	595/595/9	E	>> 560255
30	4000	3000	OPAL			595/595/9	E	>> 552328
36	3000	3700	PRM		<19	595/595/9	E	>> 552311
36	4000	3700	PRM		<19	595/595/9	E	>> 552304
36	3000	3700	PRM	yes	<19	595/595/9	E	>> 560316
36	4000	3700	PRM	yes	<19	595/595/9	E	>> 560309
36	3000	4300	PRM		<19	595/595/9	E	>> 560248
36	3000	4000	OPAL			595/595/9	E	>> 552298
36	4000	4000	OPAL			595/595/9	E	>> 552281
36	4000	4000	OPAL	yes		595/595/9	E	>> 552823
36	4000	4000	OPAL			595/595/9	E	>> 552861
44	4000	4800	OPAL			595/595/9	E	>> 552359/B
54	4000	5700	OPAL			595/595/9	E	>> 552342
54	4000	5700	OPAL			595/595/9	E	>> 552854
54	4000	5700	OPAL	yes		595/595/9	E	>> 552816

PLANO LED EVO 620/620/9mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	UGR (4H8H)	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
36	3000	3700	PRM		<19	620/620/9	E	>> 552274
36	4000	3700	PRM		<19	620/620/9	E	>> 552267
36	3000	4000	OPAL			620/620/9	E	>> 552250

PLANO LED EVO

GENERAL CARD


Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	UGR (4H8H)	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
36	4000	4000	OPAL			620/620/9	E	>> 552243
36	4000	4000	OPAL			620/620/9	E	>> 552847
36	4000	4000	OPAL	yes		620/620/9	E	>> 552809

PLANO LED EVO


GENERAL CARD

ACCESSORIES AVAILABLE


index	Name
	Plasterboard recessing kit 630x630 white (steel version)
998966	Frame steel white structure RAL9016 600x600 SM "well effect"
374845	Frame adapter KG 635x635 WHITE
552410	PLANO LED EVO - surface frame 600x600x43
552427	PLANO LED EVO - surface frame 1200x300x43
998973	Frame steel white gloss RAL9016 600x600 SM "well effect"
314766	PLANO LED Frame for surface mounting CLICK type (600mm x 600mm x 43mm)
552403	PLANO LED EVO - hanging string set (4pcs)
552397	PLANO LED EVO - plasterboard clip set (4pcs)




Plasterboard recessing kit 630x630 white (steel version) (999543)



Frame steel white structure RAL9016 600x600 SM "well effect" (998966)



Frame steel white gloss RAL9016 600x600 SM "well effect" (998973)



PLANO LED Frame for surface mounting CLICK type (600mm x 600mm x 43mm) (314766)

Card creation date: 01 October 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 114/2020; 365/2023