
# MAGNUM FUTURE LED XS BASIC

GENERAL CARD

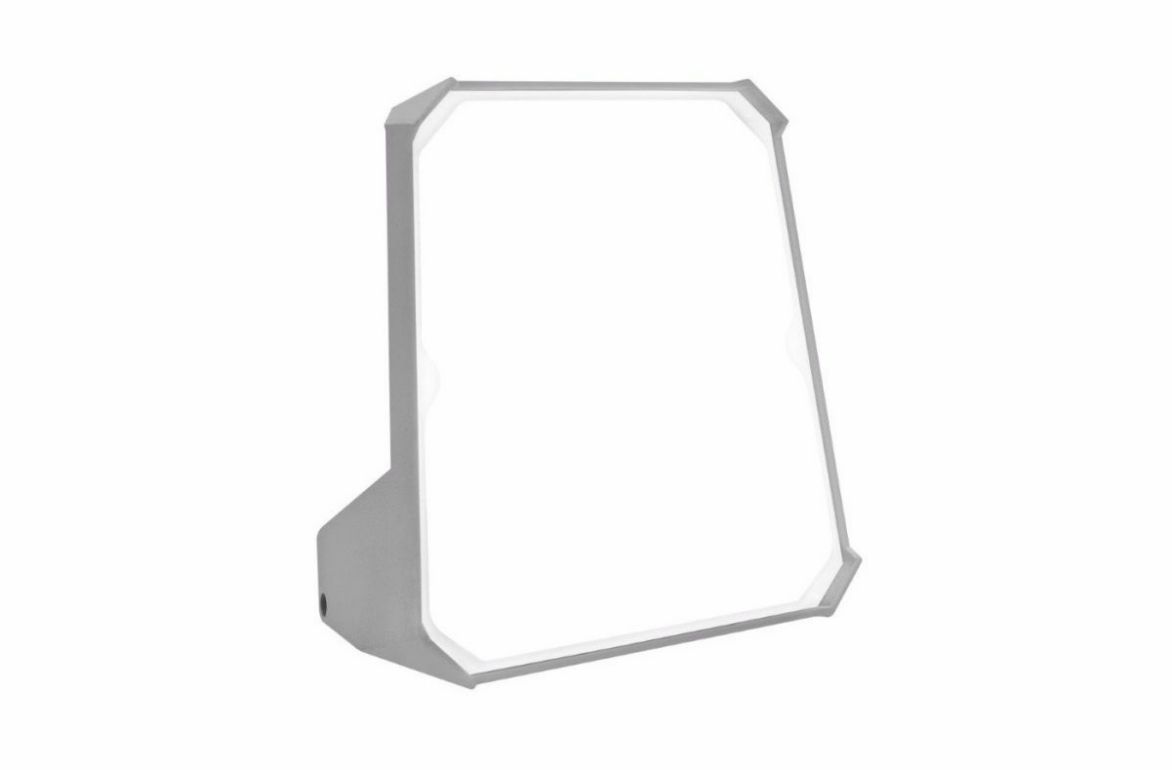

## TECHNICAL PARAMETERS

| | |
|---|---|
| **Ingress protection:** | IP54 |
| **Impact resistance:** | IK10 |
| **Nominal power [W]:** | 20.00 |
| **Colour temperature [K]:** | 4000 |
| **Luminous flux [lm]*:** | 1600 |
| **Supply voltage [V]:** | 220-240 |
| **Electrical protection class:** | II |
| **Material of the body:** | PP |
| **Colour of the body:** | grey |
| **Diffuser material:** | PC |
| **Diffuser type:** | frozen |
| **Dimensions (H/W/T/S) [mm]:** | 192/193/123; |
| **Energy efficiency class:** | F |

## CHARACTERISTICS

Compact and light LED floodlight for professional use. It provides uniform and stable directional lighting. Made of impact-resistant polipropylen (PP). Anti-glare diffuser which, despite the matt surface, transmits up to 80% of the light emitted by the diodes. The smaller size and compact design make it convenient to transport. It is equipped with a movable, multi-position arm also acting as a hook. Multi-purpose mounting bracket included.
It can be mounted on a Future Stand, significantly increasing the range and comfort of use.

## APPLICATION

It can be used as a workplace luminaire to illuminate workplaces and construction sites. The smaller size and compact design make it more convenient to transport.  The luminaire is designed for outdoor use, industrial applications or other applications where the lighting standards allow CRI <80.

# MAGNUM FUTURE LED XS BASIC

GENERAL CARD

## AVAILABLE VERSIONS

Click index >>, to see details

| Nominal power [W] | Colour temperature [K] | Luminous flux [lm]* | Cable length [m] | Dimensions (H/W/T/S) [mm] | Energy efficiency class | Index |
|---|---|---|---|---|---|---|
| 20 | 4000 | 1600 | 3 | 192/193/123 | F | >> 256943 |

# MAGNUM FUTURE LED XS BASIC


GENERAL CARD

## ACCESSORIES AVAILABLE

| index | Name |
|---|---|
| 000737 | FUTURE STAND Tripod with Click Head System |
| 000720 | Standard tripod |



FUTURE STAND Tripod with Click Head System (000737)



Standard tripod (000720)



The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 134/2023

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl