
MAGNUM FUTURE LED XS BASIC

GENERAL CARD

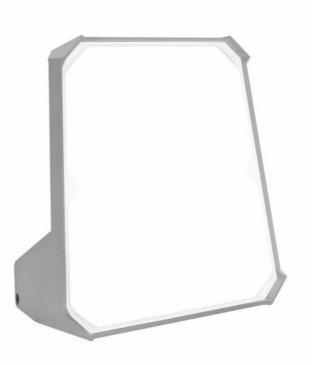

TECHNICAL PARAMETERS

Ingress protection:	IP54
Impact resistance:	IK10
Nominal power [W]:	20.00
Colour temperature [K]:	4000
Luminous flux [lm]*:	1600
Supply voltage [V]:	220-240
Electrical protection class:	II
Material of the body:	PP
Colour of the body:	grey
Diffuser material:	PC
Diffuser type:	frozen
Dimensions (H/W/T/S) [mm]:	192/193/123;
Energy efficiency class:	F

CHARACTERISTICS

Compact and light LED floodlight for professional use. It provides uniform and stable directional lighting. Made of impact-resistant polipropylen (PP). Anti-glare diffuser which, despite the matt surface, transmits up to 80% of the light emitted by the diodes. The smaller size and compact design make it convenient to transport. It is equipped with a movable, multi-position arm also acting as a hook. Multi-purpose mounting bracket included.

It can be mounted on a Future Stand, significantly increasing the range and comfort of use.

APPLICATION

It can be used as a workplace luminaire to illuminate workplaces and construction sites. The smaller size and compact design make it more convenient to transport. The luminaire is designed for outdoor use, industrial applications or other applications where the lighting standards allow CRI <80.



MAGNUM FUTURE LED XS BASIC

GENERAL CARD

AVAILABLE VERSIONS



Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Cable length [m]	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
20	4000	1600	3	192/193/123	F	>> 256943



MAGNUM FUTURE LED XS BASIC

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
000737	FUTURE STAND Tripod with Click Head System
000720	Standard tripod





FUTURE STAND Tripod with Click Head System (000737)

Standard tripod (000720)

Card creation date: 08 November 2023

